



---

**1-Mbit I<sup>2</sup>C-compatible Serial EEPROM**

---

DATASHEET Rev.1.1

**Features**

- Supply Voltage Range: 1.7V to 5.5V
- 2-wire Serial Interface I<sup>2</sup>C Compatible
  - 400 kHz and High Speed 1MHz Transfer Rate Compatibility
- Byte and Page (up to 256 Bytes) Write Mode, Partial Page Write Allowed
- Self-timed Write Cycle (3ms Maximum)
- Software Write Protection by Blocks
  - Quarter, Half or Whole Memory Array
- Hardware Write Protection on the Whole Memory Array
- Additional 256-byte Write Lockable Page and 128-bit Unique ID
- Schmitt Trigger, Filtered Inputs for Noise Suppression
- Low Operating Current
  - Write Current: 1mA (Maximum)
  - Read Current: 0.5mA (Maximum)
  - Standby Current: 1μA (Maximum)
- High Reliability
  - Endurance: 2,000,000 Write Cycles
  - Data Retention: 200 Years
  - ESD Protection (Human Body Model): 6000V
- Operating Temperature Range: -40°C to +105°C
- Green Packaging Options (RoHS Compliant, Pb/Halogen-free)
  - SOP, TSSOP, UDFN, WLCSP

**Description**

The TD24CM01-R is a 1-Mbit I<sup>2</sup>C-compatible serial EEPROM device. The device is designed to operate in a supply voltage range of 1.7V to 5.5V, with a maximum of 1MHz transfer rate, over an operating temperature range of -40°C to +105°C. The device incorporates a Write Protection pin used for hardware Write Protection on the whole memory array, and offers Software Write Protection feature for users to write-protect the memory by blocks.

The serial EEPROM memory is organized as 512 pages of 256 bytes each, totaling 131072\*8 bits. The device offers an additional 256-byte Identification Page for users to store sensitive application parameters. This page can be permanently locked in Read-only mode after the application data is written into this Page. The device also offers a separate memory block containing a factory programmed 128-bit Unique ID. This block is in Read-only mode and can be accessed to by sending a specific Read command.

The TD24CM01-R is delivered in lead-free green packages: SOP, TSSOP, UDFN and WLCSP.

## Table of Contents


<b>Features</b>	1
<b>Description</b>	1
<b>1 Pin Descriptions and Pin Configuration</b>	3
<b>2 Functional Block Diagram</b>	4
<b>3 Device Communication</b>	5
3.1 Start Condition	5
3.2 Stop Condition	5
3.3 Acknowledge (ACK)	6
3.4 Standby Mode	6
3.5 Software Reset	6
3.6 Device Reset and Initialization	6
3.7 Data Security	7
<b>4 Device Addressing</b>	8
<b>5 Read and Write Operations</b>	10
5.1 Write Operations	10
5.1.1 Byte Write	10
5.1.2 Page Write	10
5.1.3 Write Cycle Timing	12
5.1.4 Acknowledge (ACK) Polling	13
5.1.5 Write Identification Page	13
5.1.6 Lock Identification Page	14
5.1.7 Write Software Write Protection (SWP) Register	15
5.2 Read Operations	16
5.2.1 Current Address Read	16
5.2.2 Random Read	16
5.2.3 Sequential Read	17
5.2.4 Read Identification Page	18
5.2.5 Read Lock Status	18
5.2.6 Read SWP Register	18
5.2.7 Read Unique ID	20
<b>6 Electrical Specifications</b>	21
6.1 Absolute Maximum Ratings	21
6.2 DC Characteristics	21
6.3 AC Characteristics	21
6.4 Pin Capacitance	23
6.5 Reliability Characteristics	23
<b>7 Initial Delivery State</b>	24
<b>8 Ordering Information</b>	25
<b>9 Top Markings</b>	26
9.1 SOP Package Marking	26
9.2 TSSOP Package Marking	26
9.3 UDFN Package Marking	26
9.4 WLCSP Package Marking	27
<b>10 Package Information</b>	28
10.1 SOP Package Information	28
10.2 TSSOP Package Information	29
10.3 UDFN Package Information	30
10.4 WLCSP Package Information	31
<b>11 Revision History</b>	32

## 1 Pin Descriptions and Pin Configuration

Table 1–1 Pin Descriptions


Symbol	Type	Name and Function
E1 E2	Input	<b>Device Address Inputs:</b> The E1 and E2 pins are device address inputs for compatibility with other 2-wire serial EEPROM devices. These pins can be directly connected to $V_{CC}$ or GND in any combination. If these pins are left floating, the E1 and E2 pins will be internally pulled down to GND.
SDA	Input/Output	<b>Serial Data:</b> The SDA pin is an open-drain bidirectional input/output pin used to serially transfer data to and from the device.
SCL	Input	<b>Serial Clock:</b> The SCL pin is used to provide a clock to the device and is used to control the flow of data to and from the device. Command and input data present on the SDA pin is always latched in on the rising edge of SCL, while output data on the SDA pin is always clocked out on the falling edge of SCL.
$V_{CC}$	Power	<b>Device Power Supply:</b> The $V_{CC}$ pin is used to supply the source voltage to the device. Operations at invalid $V_{CC}$ voltages may produce spurious results and should not be attempted.
GND	Power	<b>Ground:</b> The ground reference for the power supply. GND should be connected to the system ground.
WP	Input	<b>Write Protection:</b> The WP pin is used to write protect the entire contents of the memory. When the WP pin is connected to Power Supply, the entire memory array becomes Write-protected, that is, the device becomes Read-only. When the WP pin is connected to GND, Write operations are enabled. If the pin is left floating, the WP pin will be internally pulled down to GND.  When the WP pin is driven high, the device address byte and the word address bytes are acknowledged, data bytes are not acknowledged.

Figure 1–1 Pin Configuration (Top View)

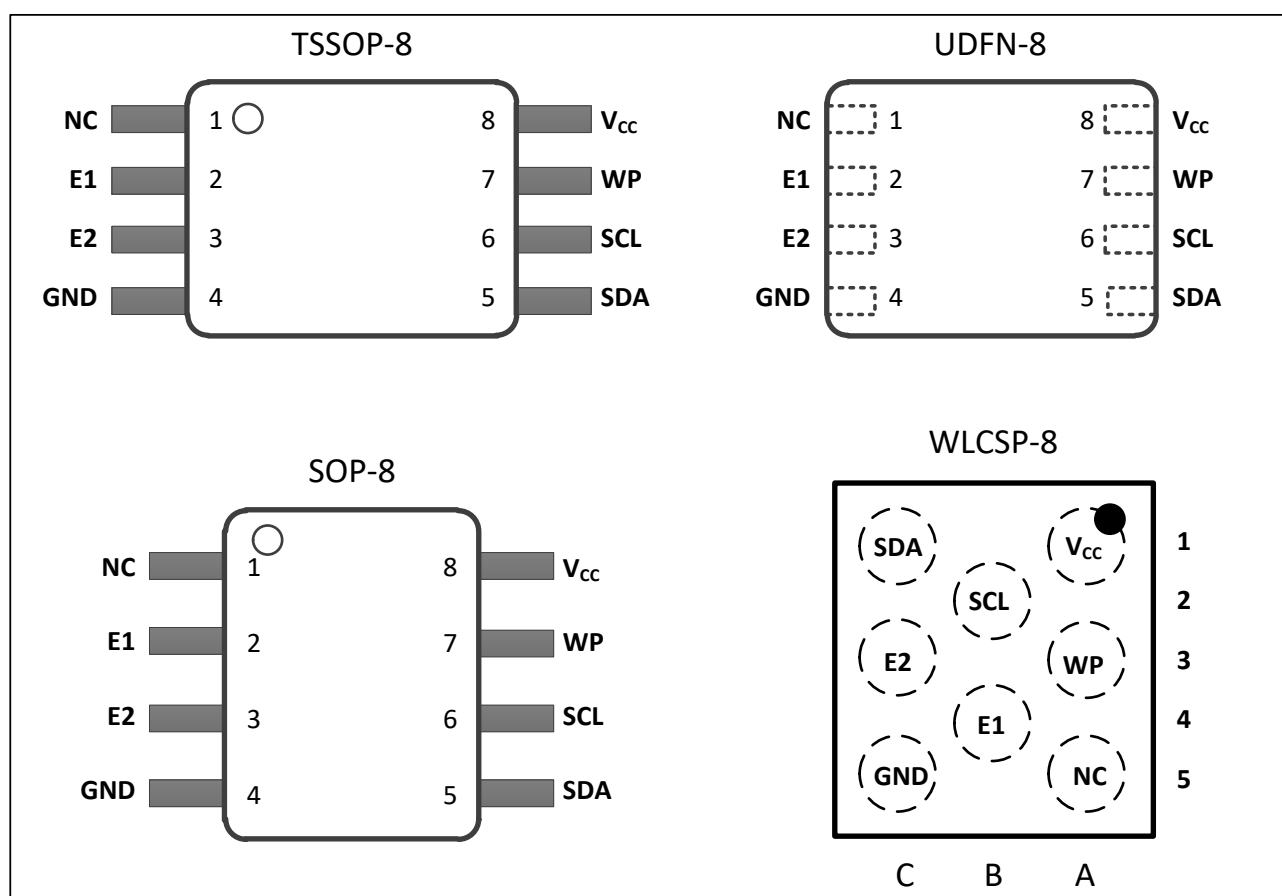

**Note:** NC = No connection; no signal should be applied on this pin.

## 2 Functional Block Diagram

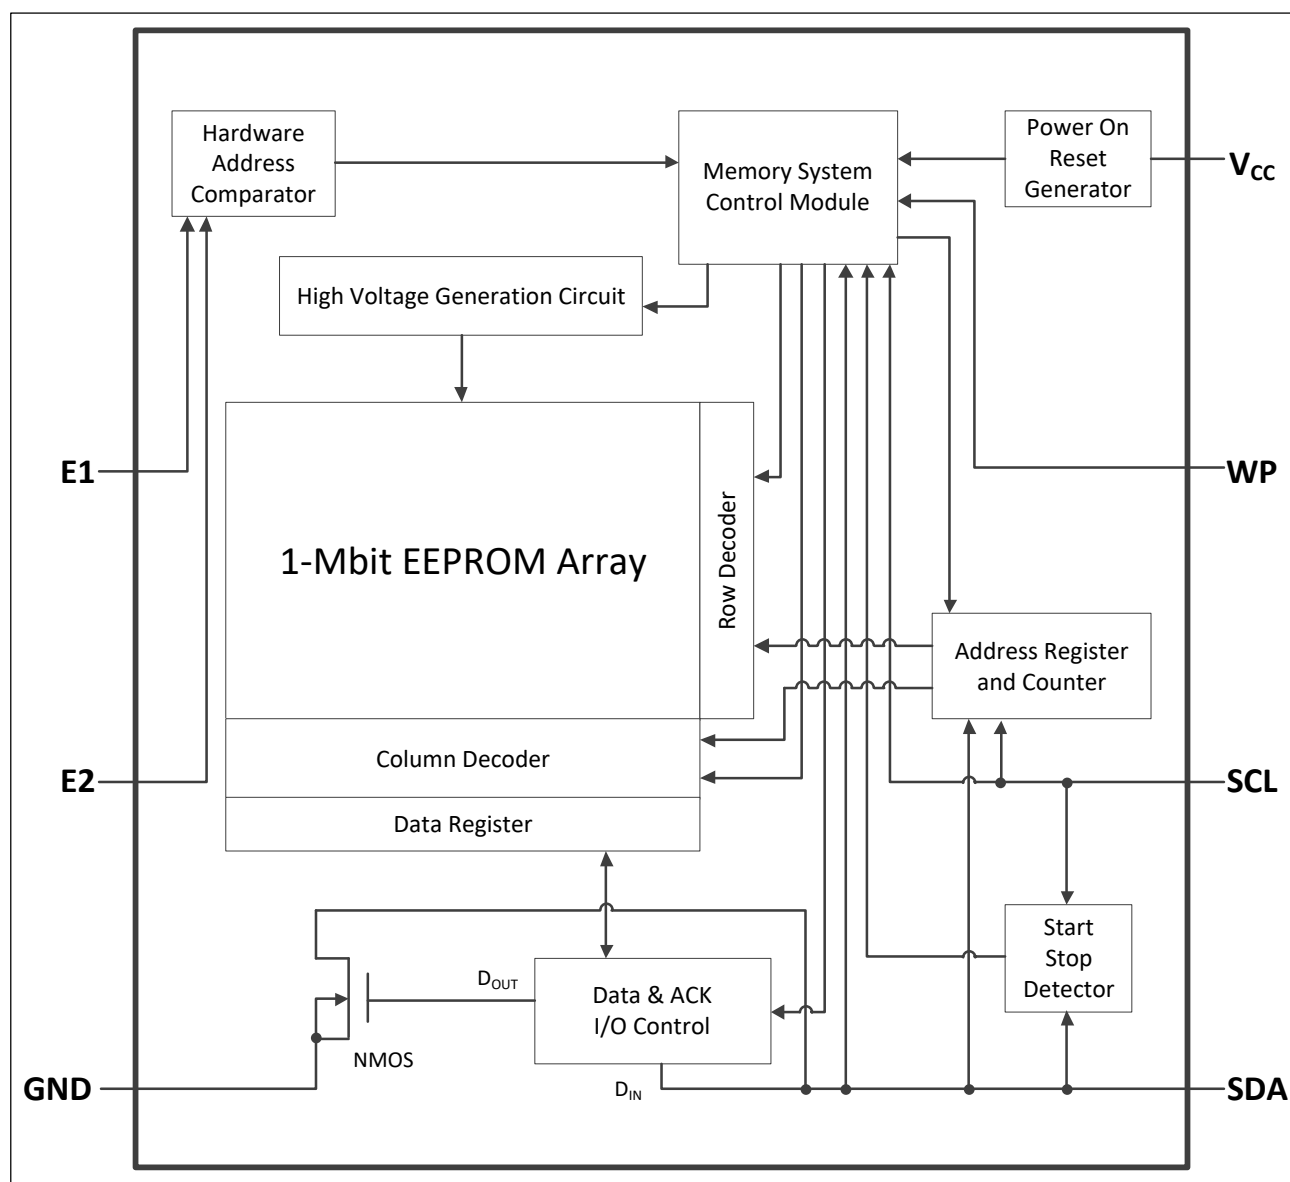

### 3 Device Communication

The TD24CM01-R operates as a slave device and utilizes a 2-wire serial interface to communicate with the Master. The Master initiates and controls all Read and Write operations to the slave devices on the serial bus, and both the Master and the slave devices can transmit and receive data on the bus.

The serial interface is comprised of just two signal lines: the Serial Clock (SCL) and the Serial Data (SDA). Data is always latched into the TD24CM01-R on the rising edge of SCL and is always output from the device on the falling edge of SCL. Both the SCL pin and SDA pin incorporate integrated spike suppression filters and Schmitt Triggers to minimize the effects of input spikes and bus noise.


All command and data information is transferred with the Most Significant Bit (MSB) first. During the bus communication, one data bit is transmitted every clock cycle, and after eight bits of data has been transferred, the receiving device must respond with an acknowledge or a no-acknowledge response bit during a ninth clock cycle generated by the Master. Therefore, nine clock cycles are required for every one byte of data transferred. There is no unused clock cycle during any Read or Write operation, so there must not be any interruptions or breaks during the data stream.

During data transfers, data on the SDA pin must only change while SCL is low, and the data must remain stable while SCL is high. If data on the SDA pin changes while SCL is high, then either a Start or a Stop condition will occur. The number of data bytes transferred between a Start and a Stop condition is not limited and is determined by the Master.

#### 3.1 Start Condition

A Start condition occurs when there is a high-to-low transition on the SDA pin while the SCL pin is stable in Logic 1 state. The Start condition must precede any command as the Master uses a Start condition to initiate any data transfer sequence (see [Figure 3-1](#)). The TD24CM01-R will continuously monitor the SDA and SCL pins for a Start condition, and the device will not respond unless one is given.

Figure 3-1 Start, Stop, and ACK

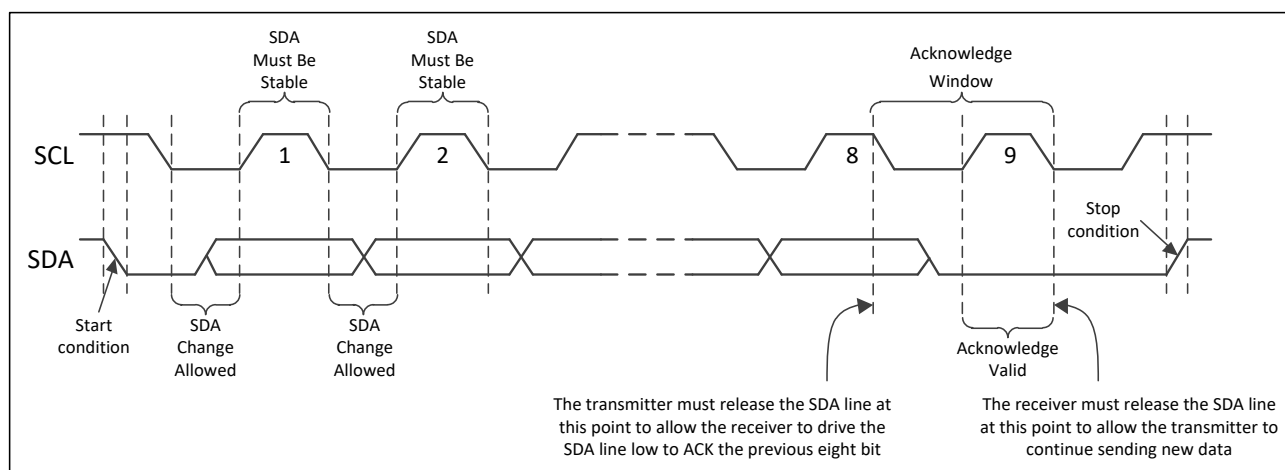

#### 3.2 Stop Condition

A Stop condition occurs when there is a low-to-high transition on the SDA pin while the SCL pin is stable in Logic 1 state (see [Figure 3-1](#)). A stop condition terminates communication between the TD24CM01-R and the Master. A Stop condition at the end of a Write command triggers the EEPROM internal write cycle. Otherwise, the TD24CM01-R subsequently returns to Standby mode after receiving a Stop condition.

### 3.3 Acknowledge (ACK)

After each byte of data is received, the TD24CM01-R should acknowledge to the Master that it has received the data byte successfully. This is accomplished by the Master first releasing the SDA line and providing the ACK/NACK clock cycle (a ninth clock cycle for every byte). During the ACK/NACK clock cycle, the TD24CM01-R must output Logic 0 as ACK for the entire clock cycle so that the SDA line must be stable in Logic 0 state during the entire high period of the clock cycle (see [Figure 3–1](#)).

### 3.4 Standby Mode


The TD24CM01-R features a low-power Standby mode which is enabled:

- (1) Upon power-up;
- (2) After the receipt of a Stop condition in Read operation;
- (3) The completion of any internal operations.

### 3.5 Software Reset

After an interruption in protocol, power loss, or system reset, any 2-wire part can be reset by following these steps: (1) Create a Start condition; (2) Clock nine cycles; (3) Create another Start condition followed by a Stop condition (see [Figure 3–2](#)).

**Figure 3–2 2-wire Software Reset**

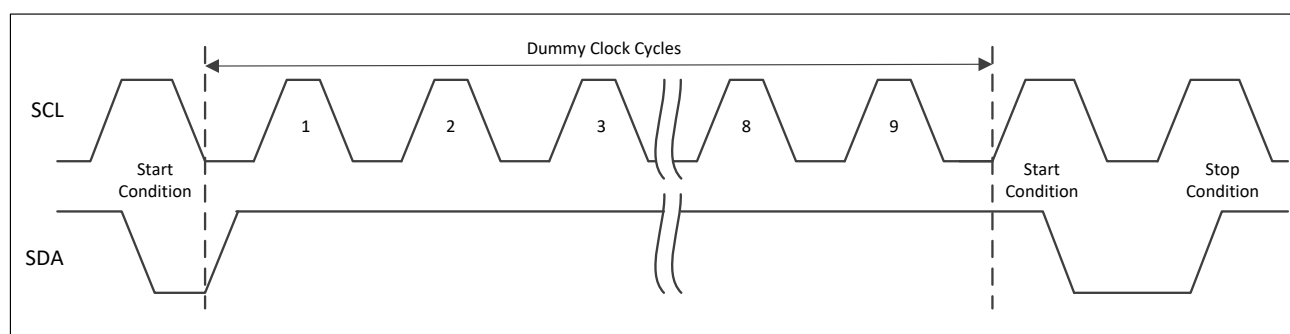


### 3.6 Device Reset and Initialization

The TD24CM01-R incorporates a Power-On Reset (POR) circuit to prevent inadvertent operations during power-up. On a cold power-up, the device does not respond to any instructions until the supply voltage reaches the internal power-on reset threshold voltage ( $V_{POR}$ ). The supply voltage must rise continuously between  $V_{POR}$  and  $V_{CC}(\text{Min})$  without any ring back to ensure a proper power-up. Once the supply voltage passes  $V_{POR}$ , the device is reset and enters Standby mode. However, no protocol should be issued to the device until a valid and stable supply voltage is applied for the time specified by the  $t_{INIT}$  parameter. The supply voltage must remain stable and valid until the end of the protocol transmission, and for a Write instruction, until the end of the internal write cycle (see [Figure 3–3](#)).

This POR behavior is bi-directional. It protects the TD24CM01-R against brown-out failure caused by a temporary loss of power. In a similar way, as soon as the supply voltage drops below the internal brown-out reset threshold voltage ( $V_{BOR}$ ), the device is reset and stops responding to any instructions (see [Figure 3–3](#)). The  $V_{BOR}$  level is set below the  $V_{POR}$  level.

Parameters related to power-up and power-down conditions are listed in [Table 3–1](#).

**Figure 3–3 Power-up and Power-down Timing**

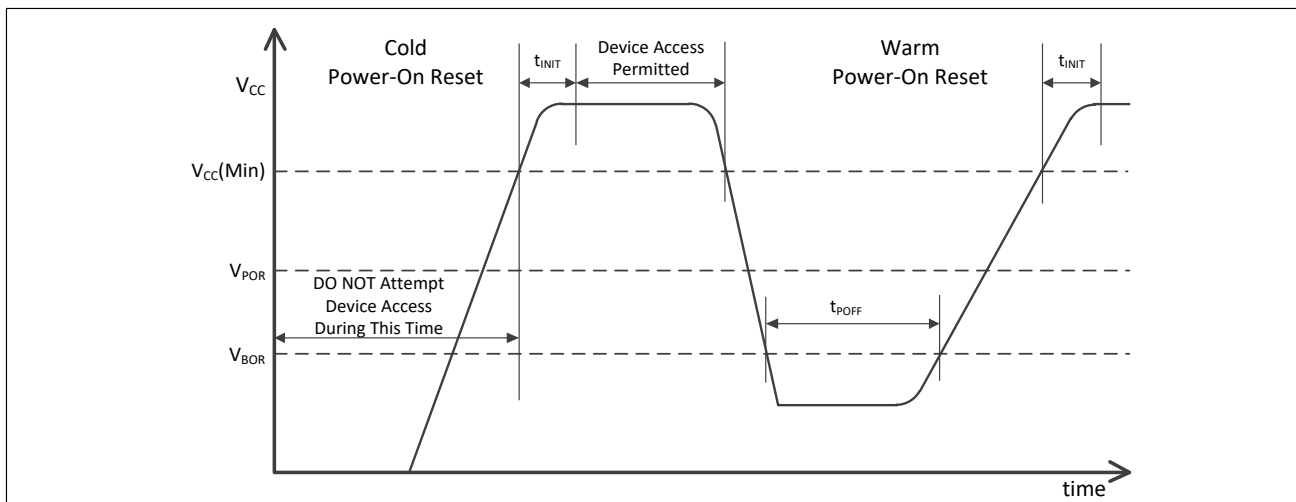

**Table 3–1 Power-up and Power-down Conditions**

Symbol	Parameter	Min	Max	Unit
$V_{\text{POR}}$	Power-On Reset Voltage	-	1.5	V
$V_{\text{BOR}}$	Brown-Out Reset Voltage	1.2	-	V
$t_{\text{INIT}}$	Time from $V_{CC}(\text{Min})$ to First Command	100	-	$\mu\text{s}$
$t_{\text{POFF}}$	Warm Power Cycle Off Time	100	-	$\mu\text{s}$

### 3.7 Data Security

The TD24CM01-R incorporates a hardware data protection feature that allows the user to write protect the whole memory array (and Identification Page) when the WP pin is connected directly to  $V_{CC}$ .

The TD24CM01-R also offers a Software Write Protection (SWP) feature that allows the user to write protect the memory array by blocks when writing specific values in the internal non-volatile SWP register (see [Section 5.1.7](#) for details).

## 4 Device Addressing

The TD24CM01-R requires a 7-bit device address and a Read/Write select bit following a Start condition from the Master to initiate communication with the serial EEPROM. The device address byte is comprised of a 4-bit device type identifier followed by three device address bits (E2, E1, and E0) and a R/W select bit and is clocked by the Master on the SDA pin with the most significant bit (MSB, bit 7) first.

The TD24CM01-R will respond to two unique device type identifiers. The device type identifier of '1010' is necessary to select the device memory for normal Read or Write operation. The device type identifier of '1011' is used (1) to select the Identification Page for Read or Write/Lock operation; (2) to select the Software Write Protection register for Read or Write operation; (3) for Read Unique ID (see [Table 4-1](#)).

The software device address bits (E2, E1) must match their corresponding hard-wired device address inputs (E2, E1). The eighth bit of the address byte is the R/W operation selection bit. A Read operation is selected if this bit is Logic 1, and a Write operation is selected if this bit is Logic 0. Upon a compare of the device address byte, the device outputs an ACK or a NACK during the ninth clock cycle if the compare is true or not true, respectively. The device will return to the low-power Standby mode after a NACK.

**Table 4-1 TD24CM01-R Device Address Byte**

Function	Device Type Identifier				Device Address			Read/Write
	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
When accessing the 1-Mbit memory array	1	0	1	0	E2	E1	A16 <sup>[1]</sup>	$\overline{\text{R/W}}$
When accessing the Identification Page	1	0	1	1	E2	E1	X <sup>[2]</sup>	$\overline{\text{R/W}}$
When accessing the Lock Identification Page bit	1	0	1	1	E2	E1	X	0
When accessing the Software Write Protection register	1	0	1	1	E2	E1	X	$\overline{\text{R/W}}$
When accessing the Unique ID	1	0	1	1	E2	E1	X	1

**Notes:** <sup>[1]</sup> A = Significant address bit.

<sup>[2]</sup> X = Bit is Don't Care.



Once the TD24CM01-R has acknowledged the device address byte, the device waits for the Master to send two word address bytes (first word address byte sent first, followed by the second word address byte) for a certain Read or Write instruction according to [Table 4–2](#). The TD24CM01-R responds to each address byte with an ACK.

**Table 4–2 TD24CM01-R Word Address Bits**

Function	MSB Word Address Bits			First Word Address Byte								Second Word Address Byte							
	bit 3	bit 2	bit 1 <sup>[1]</sup>	bit 15	bit 14	bit 13	bit 12	bit 11	bit 10	bit 9	bit 8	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
Random Read	E2	E1	A16 <sup>[2]</sup>	A15	A14	A13	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0
Byte/Page Write	E2	E1	A16	A15	A14	A13	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0
Read Identification Page	E2	E1	X <sup>[3]</sup>	X	X	X	X	X	0	0	X	A7	A6	A5	A4	A3	A2	A1	A0
Write Identification Page	E2	E1	X	X	X	X	X	X	0	0	X	A7	A6	A5	A4	A3	A2	A1	A0
Lock Identification Page	E2	E1	X	X	X	X	X	X	1	0	X	X	X	X	X	X	X	X	X
Read Lock Status	E2	E1	X	X	X	X	X	X	0	0	X	X	X	X	X	X	X	X	X
Write Software Write Protection Register	E2	E1	X	X	X	X	X	X	1	1	X	X	X	X	X	X	X	X	X
Read SWP Register	E2	E1	X	X	X	X	X	X	1	1	X	X	X	X	X	X	X	X	X
Read Unique ID	E2	E1	X	X	X	X	X	X	0	1	X	X	X	X	X	A3	A2	A1	A0

**Notes:** <sup>[1]</sup> Address bits defined inside the Device Address Byte (see [Table 4–1](#)).

<sup>[2]</sup> A = Significant address bit.

<sup>[3]</sup> X = Bit is Don't Care.

## 5 Read and Write Operations

### 5.1 Write Operations

#### 5.1.1 Byte Write

For a Byte Write operation, the Master sends a Start condition followed by the device type identifier of '1010', the device address bits and the  $\overline{R/W}$  select bit set to Logic 0. The TD24CM01-R responds with an ACK during the ninth clock cycle and waits for the Master to send two word address bytes (first word address byte and second word address byte). Then the device responds to each word address byte with an ACK. After receiving ACKs from the TD24CM01-R, the Master transmits one data byte. If the addressed location has been Write-protected, by WP pin connected to  $V_{CC}$ , the device responds with a NACK, and the location is not modified. If the addressed location is not Write-protected, by WP pin set to GND, the device will respond with an ACK (see [Figure 5-1](#) and [Figure 5-2](#)). The Master ends the Byte Write sequence with a Stop condition during the 10th clock cycle to initiate the internally self-timed write cycle. A Stop condition issued during any other clock cycle during the Write operation will not trigger the internal write cycle.


Once the write cycle begins, the preloaded data word will be programmed in the amount of time not to exceed the  $t_{WR}$  specification (see [Figure 5-5](#)). During the time, the Master should wait a fixed time by the  $t_{WR}$  specification, or for time sensitive applications, an ACK polling routine can be implemented. All inputs are ignored by the device during the write cycle and the device will not respond until the write cycle is completed. The serial EEPROM will increment its internal address counter each time a byte is written.

#### 5.1.2 Page Write


The 1-Mbit serial EEPROM is capable of writing up to 256 data bytes at a time by executing the Page Write protocol sequence. A partial or full Page Write operation is initiated the same as a Byte Write operation except that the Master does not send a Stop condition after the first data word is clocked in. Instead, after the device has acknowledged to the first data word, the Master can transmit up to 255 more data words. The device responds with an ACK after each data word is received if the WP pin is set to GND while the device is not acknowledged to each data word and the addressed locations are not modified if the WP pin is connected to  $V_{CC}$  (see [Figure 5-3](#) and [Figure 5-4](#)). After the device acknowledges to the last data word, the Master should terminate the Page Write sequence with a Stop condition to start the internal write cycle. A Stop condition issued at any other clock cycle will not initiate the internally self-timed write cycle and the Write sequence will have to be repeated again. Once the write cycle begins, the data words should be programmed in the amount of time not exceeding the  $t_{WR}$  specification (see [Figure 5-5](#)). During this time, the Master should wait a fixed time by the specified  $t_{WR}$  parameter, or for time sensitive applications, an ACK polling routine can be implemented.

The lower eight bits of the word address are internally incremented following the receipt of each data word. The higher word address bits are not incremented, retaining the memory page row location. When the internally generated word address reaches the page boundary, then the following data word is placed at the beginning of the same page. If more than 256 data words are transmitted to the device, the data word address will roll over and the previous data will be overwritten. The address roll-over during a Write sequence is from the last byte of the current page to the first byte of the same page.


**Figure 5–1 Byte Write Operation with Write Protection Pin Set to Low**

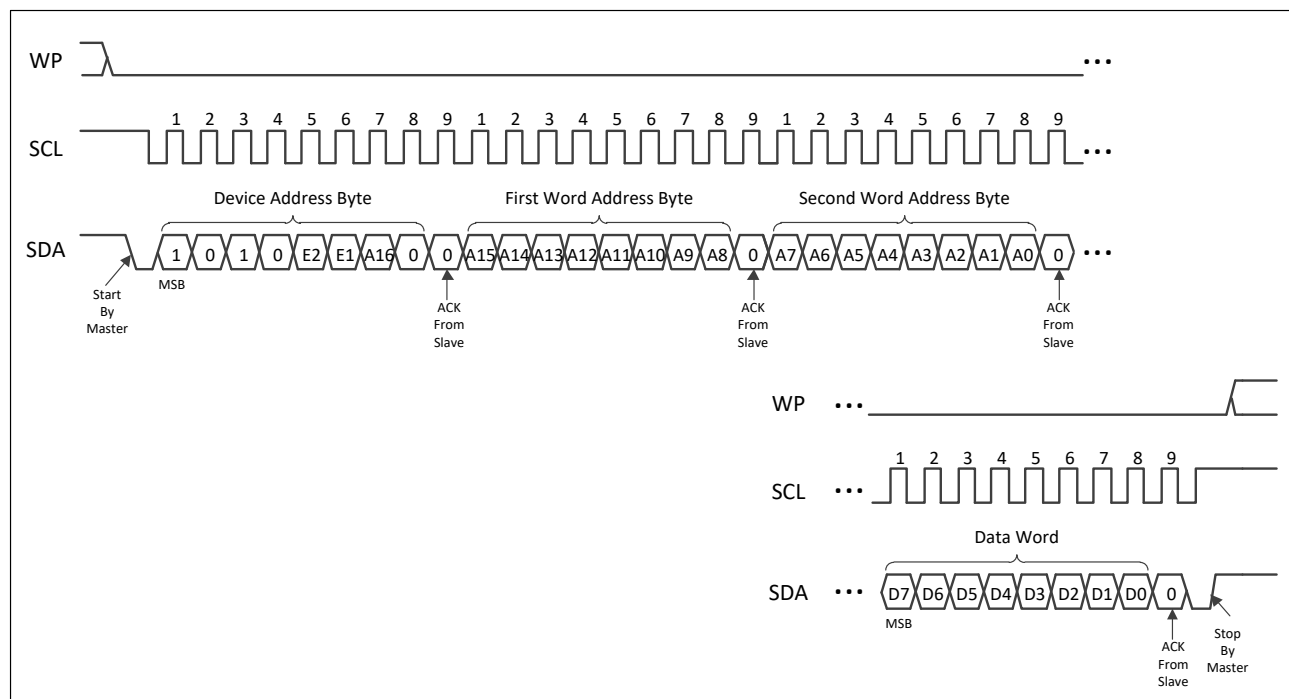


**Figure 5–2 Byte Write Operation with Write Protection Pin Set to High**

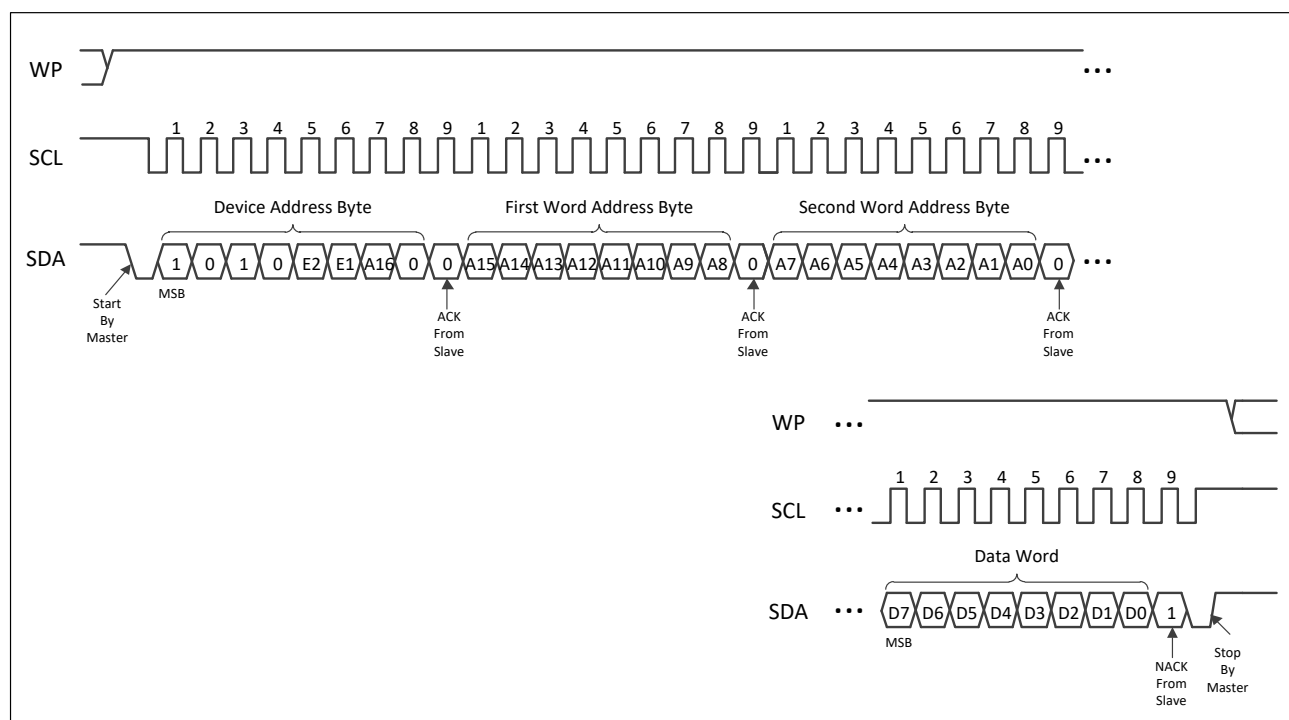

**Figure 5–3 Page Write Operation with Write Protection Pin Set to Low**

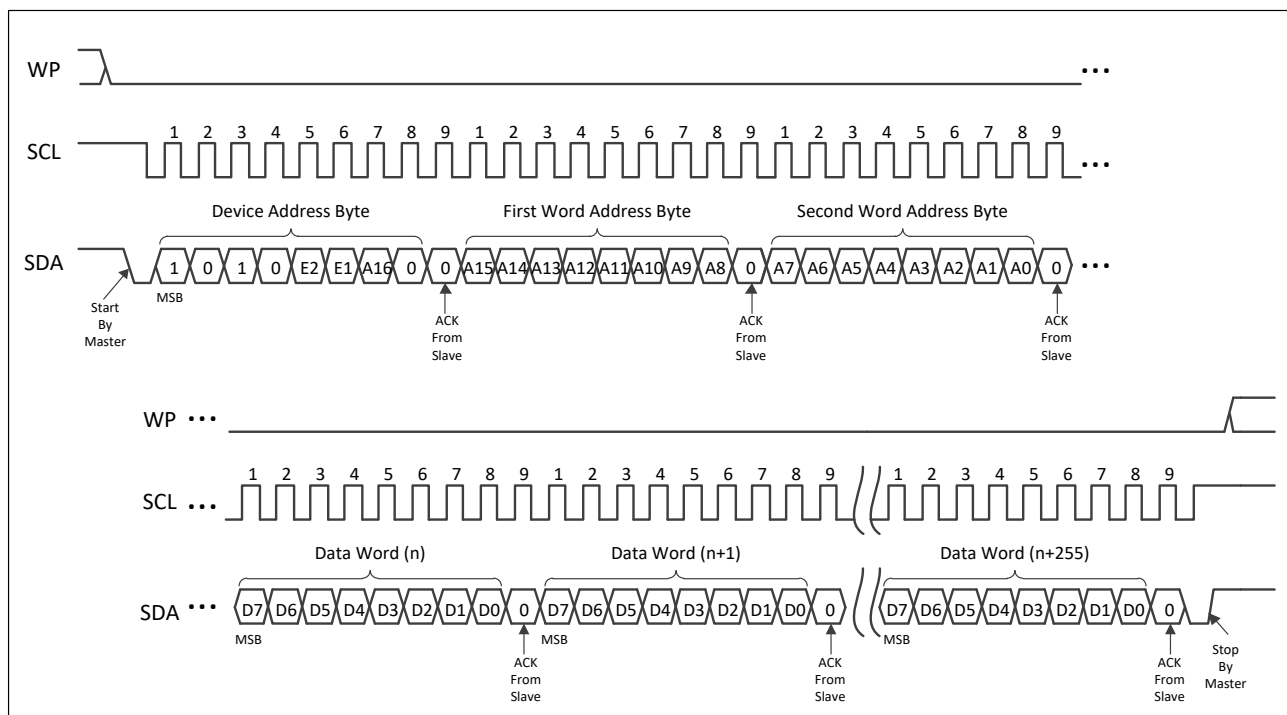


**Figure 5–4 Page Write Operation with Write Protection Pin Set to High**

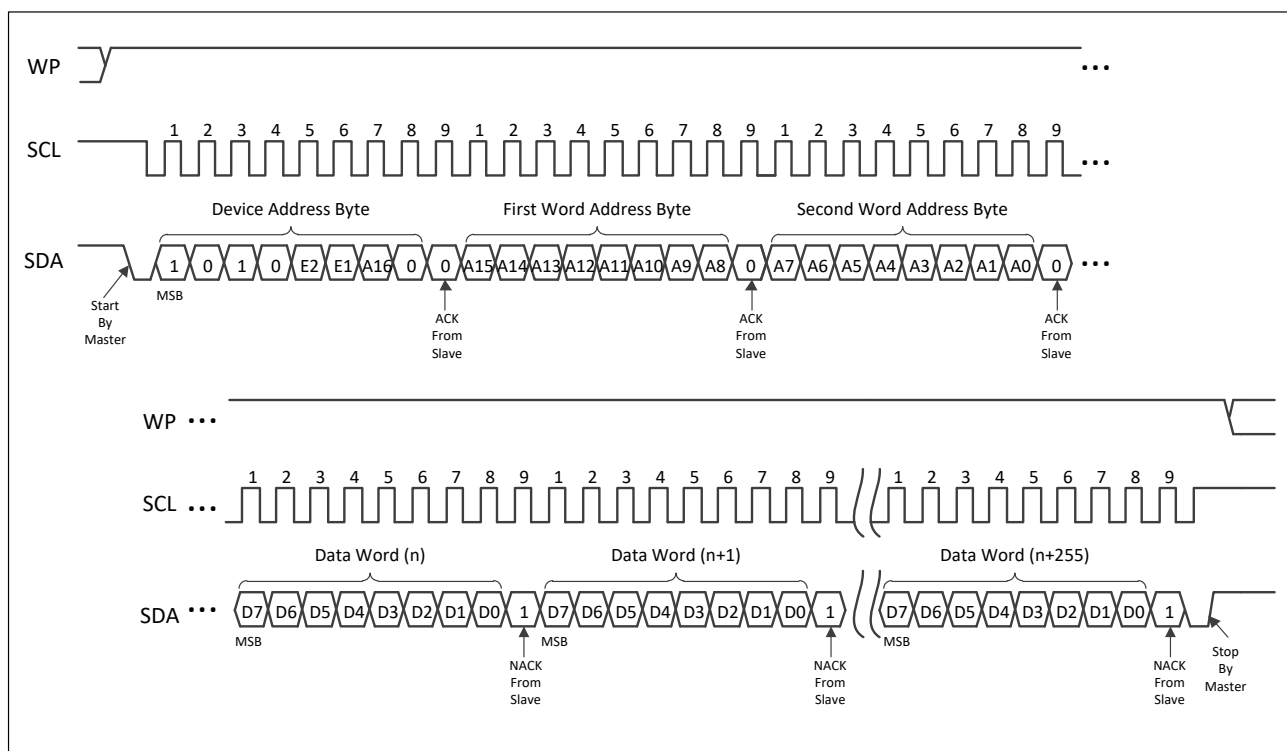

### 5.1.3 Write Cycle Timing

The length of the self-timed write cycle, or  $t_{WR}$ , is defined as the amount of time from a valid Stop condition that begins the internal write sequence to the Start condition of the first device address byte sent to the TD24CM01-R that it subsequently responds to with an ACK (see [Figure 5–5](#)).


Figure 5-5 Write Cycle Timing

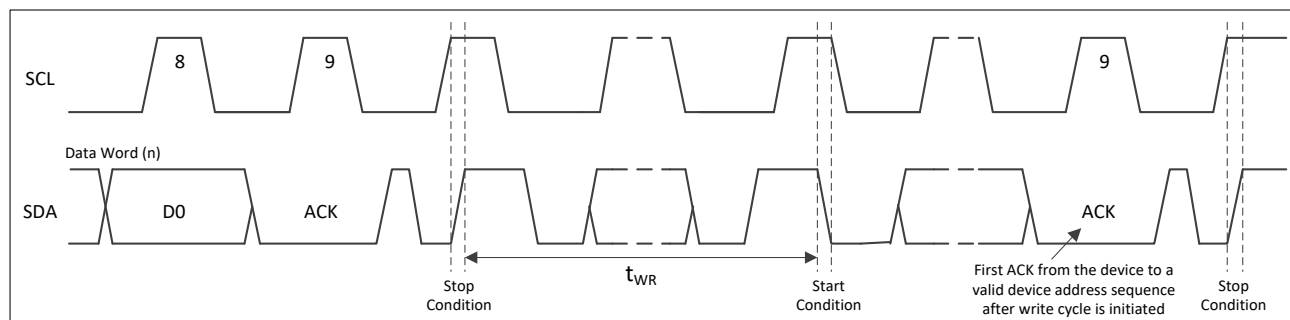

#### 5.1.4 Acknowledge (ACK) Polling

An ACK polling routine can be implemented to optimize time sensitive applications that would not prefer to wait the fixed maximum write cycle time but would prefer to know immediately when the serial EEPROM write cycle has completed to start a subsequent operation. Once the internally self-timed write cycle has started, the device inputs are disabled and ACK polling can be initiated. An ACK polling routine involves sending a valid Start condition followed by the device address byte. While the write cycle is in progress, the device will not respond with an ACK, indicating the device is busy writing data. Once completed, the device returns an ACK and the next device operation can be started (see Figure 5-6).

Figure 5-6 Acknowledge Polling Flow Chart

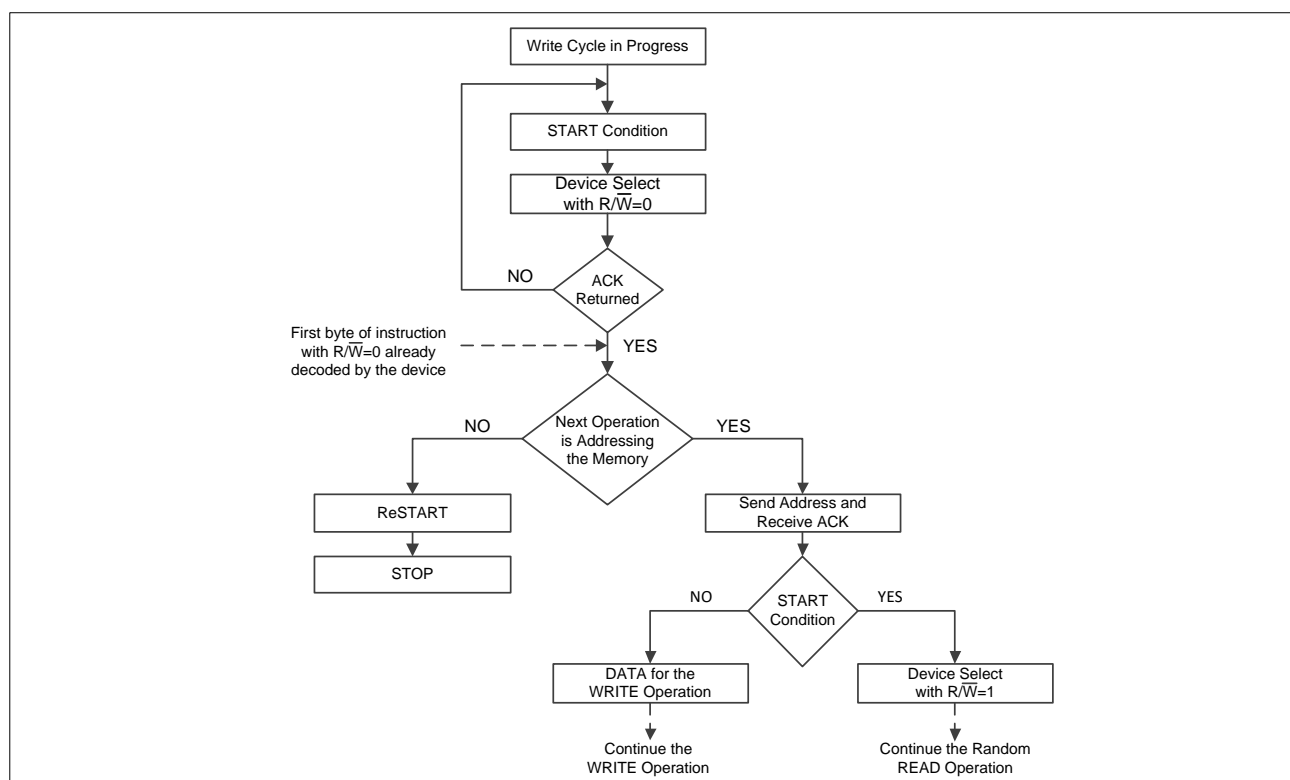


#### 5.1.5 Write Identification Page

The TD24CM01-R offers a 256-byte Identification Page (ID Page) in addition to the 1-Mbit memory array for storage of specific application data. This Identification Page can be written and permanently locked in Read-only mode after the data is written into this Page. The Identification Page is written by issuing the Write Identification Page instruction (see Figure 5-7), which is similar to Page Write, except that:

- The device type identifier is defined as '1011';
- The word address bits A10:A9 must be '00', bits A16:A11 and A8 are Don't Care;
- The word address bits A7:A0 define the byte locations inside the ID Page (see [Table 4-2](#)).

If the Identification Page has been locked, the data bytes transferred during the Write Identification Page instruction will not be acknowledged.

**Figure 5-7 Write Identification Page**

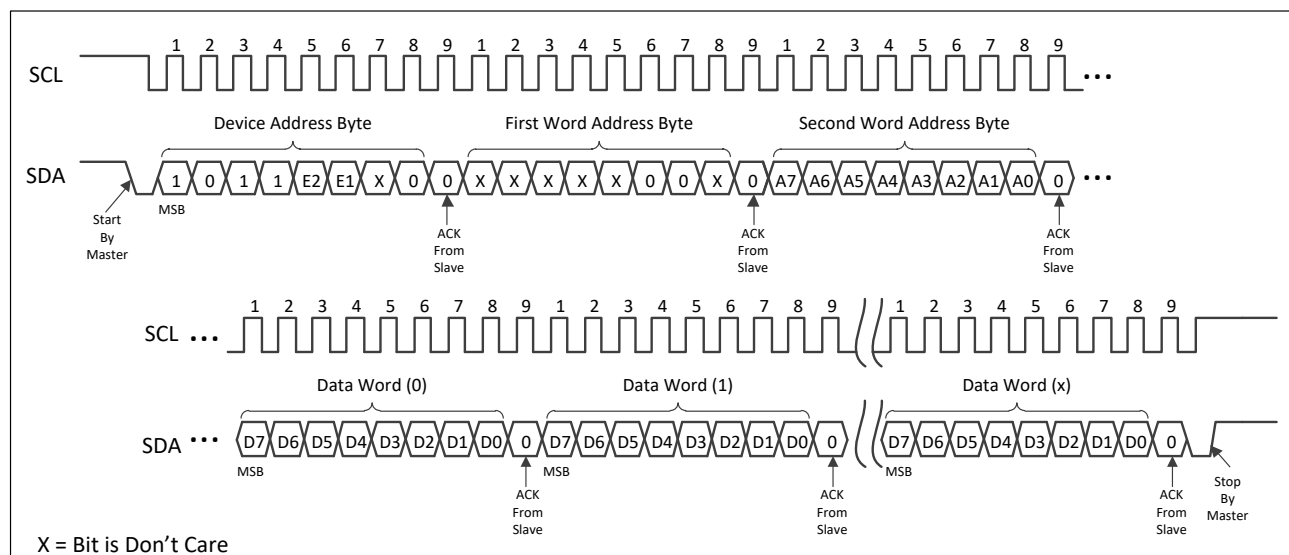


## 5.1.6 Lock Identification Page

The Lock Identification Page (Lock ID) instruction permanently locks the Identification Page in Read-only mode. The Lock ID instruction is similar to Byte Write, except the following specific conditions:

- The device type identifier is defined as '1011';
- The word address bits A10:A9 must be '10' and other word address bits are Don't Care;
- The data byte must be equal to the binary value xxxx\_xx1x, where x is Don't Care (see [Figure 5-8](#)).

Once a valid Lock ID instruction has been executed, if another Lock ID instruction is issued, the device will respond with a NACK to the data byte.

**Figure 5-8 Lock Identification Page**

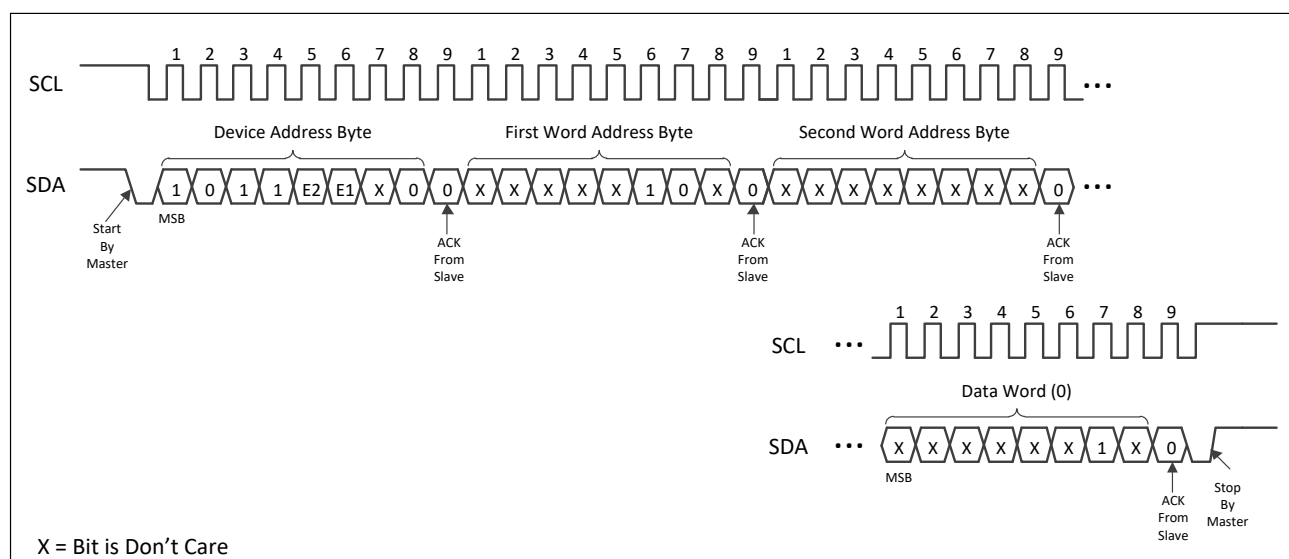

## 5.1.7 Write Software Write Protection (SWP) Register

By writing specific values in the Software Write Protection register, the 1-Mbit memory array can be Write-protected by blocks, which size can be defined as:


- The upper quarter memory array (memory address: 18000h to 1FFFFh);
- The upper half memory array (memory address: 10000h to 1FFFFh);
- The whole memory array (memory address: 00000h to 1FFFFh).

Writing in the Software Write Protection register is performed with a Write SWP Register instruction (see [Figure 5–9](#)). This instruction is similar to Byte Write, except that:

- The device type identifier is defined as ‘1011’;
- the word address bits A10:A9 must be ‘11’ and other word address bits are Don’t Care;
- The higher six bits of the data word byte are Don’t Care; bit 1 and bit 0 (D1 and D0) define the size of Write-protected memory block to be against Write instructions (see [Table 5–1](#)).

Writing more than one byte will discard the write cycle and the content in the SWP register will not be changed. Writing the SWP register is performed independently of the state of the WP pin connection. Upon a certain instruction send by the Master, the device will automatically load the last configuration of the SWP register.

**Figure 5–9 Write Software Write Protection Register**

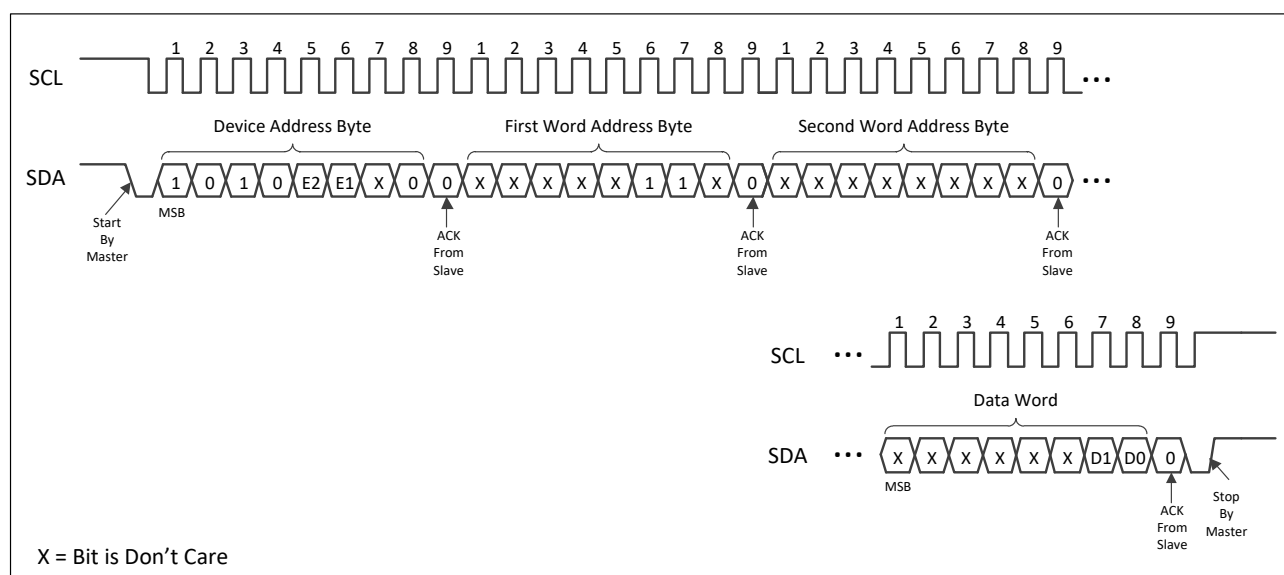

**Table 5–1 Software Write Protection Register**

	Register Data Byte						
	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1      bit 0
Write	X <sup>[1]</sup>	X	X	X	X	X	Size of Write-protected Block 00: none 01: the upper quarter memory is write-protected 10: the upper half memory is write-protected 11: the whole memory is write-protected
Read	0	0	0	0	0	0	

**Note:** <sup>[1]</sup> X = Bit is Don't Care.

## 5.2 Read Operations


All Read operations are initiated by the Master transmitting a Start condition, a device type identifier of '1010' or '1011', software device address bits (E2, E1) that match corresponding hard-wired address pins (E2, E1), and the R/W select bit with Logic 1 state. In the following clock cycle, the TD24CM01-R should respond with an ACK. The subsequent protocol depends on the type of Read operation desired. There are three Read operations for memory array: Current Address Read, Random Address Read, and Sequential Read with the device type identifier of '1010'; four Read operations for Identification Page, SWP register and Unique ID: Read Identification Page, Read Lock Status, Read SWP Register and Read Unique ID with the device type identifier of '1011'. Read operations are performed independently of the state of the WP pin connection and the content in the SWP register.

### 5.2.1 Current Address Read

For a Current Address Read operation, the Master sends a Start condition followed by transmitting the device address byte with the R/W bit set to Logic 1 (see [Figure 5-10](#)). The TD24CM01-R should respond with an ACK and then serially transmits the data word addressed by the internal address counter. This address maintained by the internal address counter is the last address accessed during the last Read or Write operation. The counter is then incremented by one and the address will stay valid between operations as long as power to the device is supplied. The address roll-over during a Read operation is from the last byte of the last page to the first byte of the first page. To end the command, the Master responds with a NACK followed by a Stop condition.

Note that the internal address counter value is defined by instructions accessing the 1-Mbit memory or the Identification Page or the Unique ID. For example, when accessing the ID Page, the counter value is loaded with the byte location in the ID Page. Therefore the next Current Address Read in the memory uses this new address counter value. When accessing the memory, it is recommended to always use the Random Read instruction (see [Section 5.2.2](#)) instead of the Current Address Read instruction.

**Figure 5-10 Current Address Read**

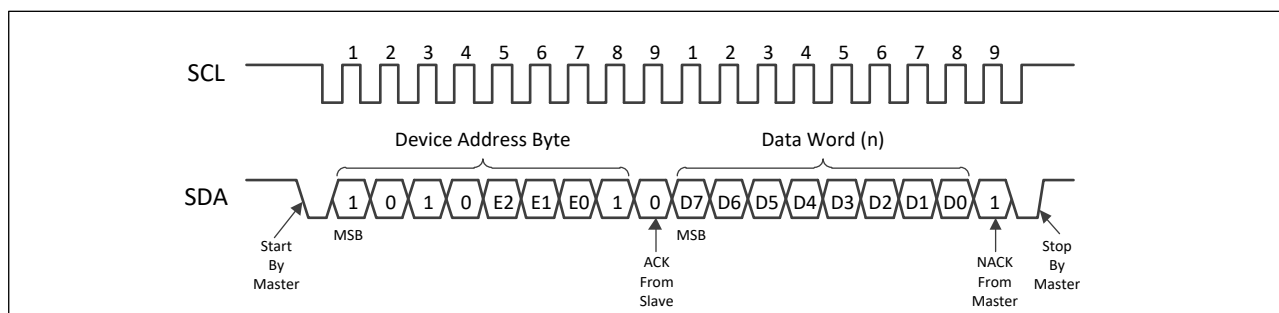


### 5.2.2 Random Read

A Random Read operation allows the Master to access any memory location in a random manner and requires a dummy write sequence to preload the starting data word address. To perform a Random Read, the device address byte and the word address bytes are transmitted to the TD24CM01-R as part of the dummy write sequence (see [Figure 5-11](#)). Once the device address byte and word address bytes are clocked in and acknowledged by the TD24CM01-R, the Master must generate another Start condition. The Master initiates a Current Address Read by sending another device address byte with the R/W bit set to Logic 1. The TD24CM01-R responds with an ACK to the device address byte and serially clocks out the first data word and



increments its internal address counter. The device will continue to transmit sequential data words as long as the Master continues to acknowledge each data word. To end the sequence, the Master responds with a NACK followed by a Stop condition.


**Figure 5–11 Random Read**

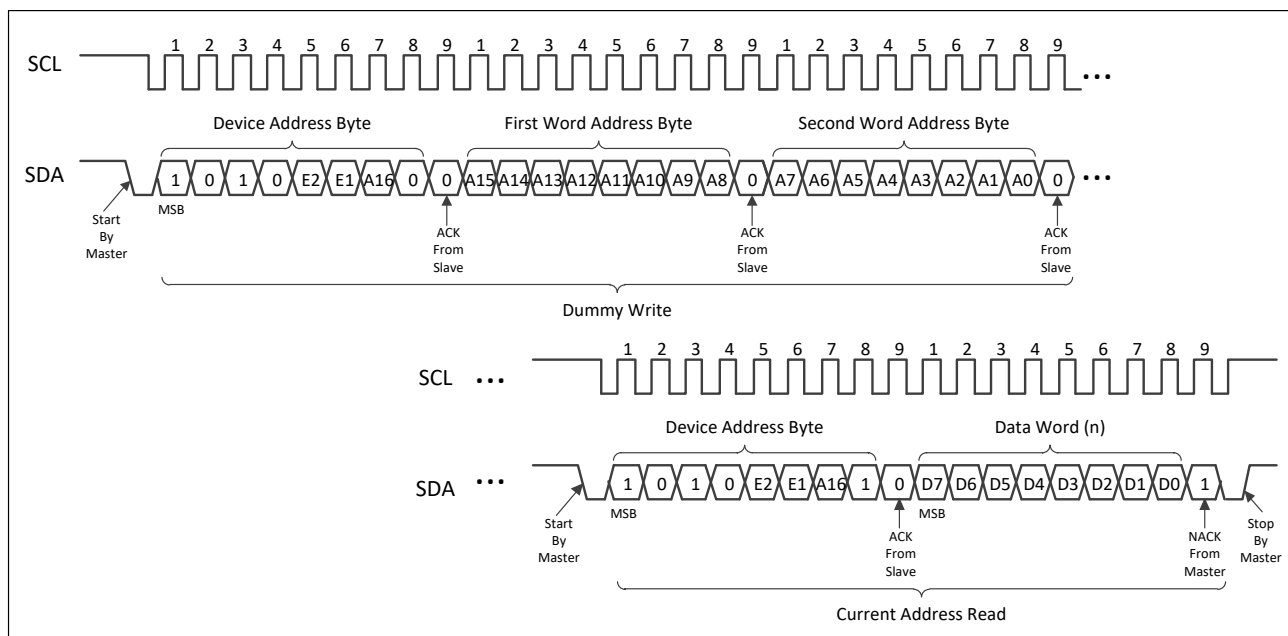

## 5.2.3 Sequential Read

A Sequential Read operation is initiated in the same way as either a Current Address Read or a Random Read, except that after the TD24CM01-R transmitting the first data word, the Master responds with an ACK instead of a NACK. As long as the TD24CM01-R receives an ACK, it will continue to increment the data word address and serially clock out the sequential data words (see Figure 5–12). When the internal address counter is at the last byte of the last page, the word address will roll over to the beginning of the memory array and the Sequential Read operation will continue. The Sequential Read operation is terminated by the Master responding with a NACK followed by a Stop condition.

**Figure 5–12 Sequential Read**

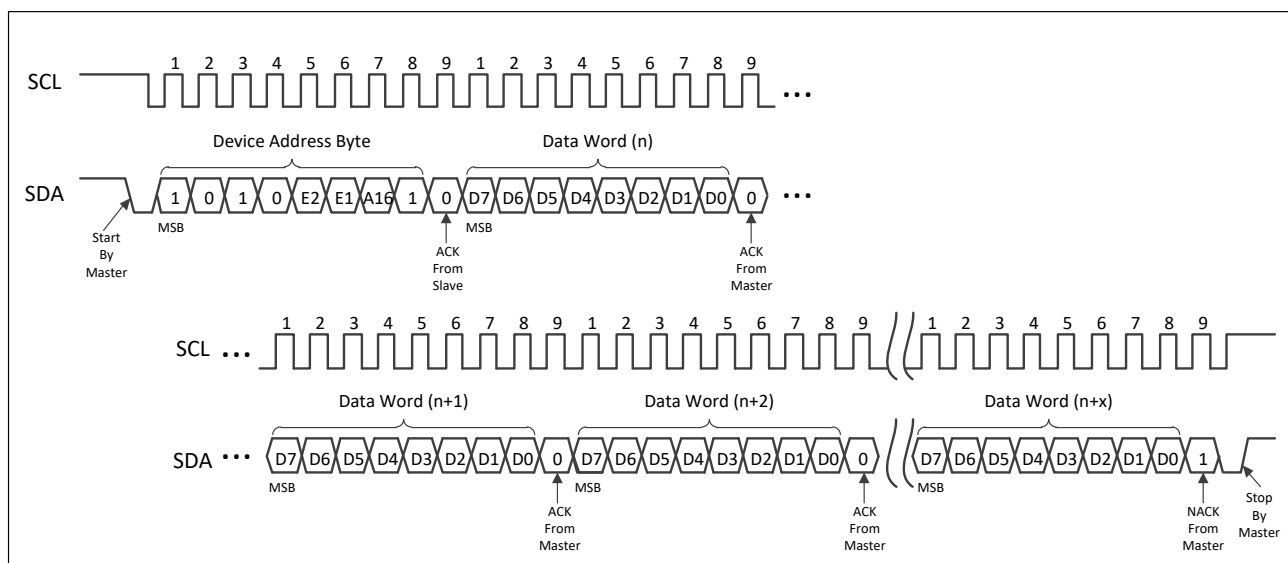


### 5.2.4 Read Identification Page

The Identification Page can be read by issuing a Read Identification Page instruction. This instruction uses the same protocol and format as Random Read, except that:

- The device type identifier is defined as '1011';
- The word address bits A10:A9 must be '00', bits A16:A11 and A8 are Don't Care;
- The word address bits A7:A0 define the byte locations inside the ID Page (see [Table 4-2](#)).

When the end of Identification Page is reached, the word address will roll over to the beginning of the Identification Page. The Read Identification Page operation is terminated by the Master responding with a NACK followed by a Stop condition (see [Figure 5-13](#)).

**Figure 5-13 Read Identification Page**

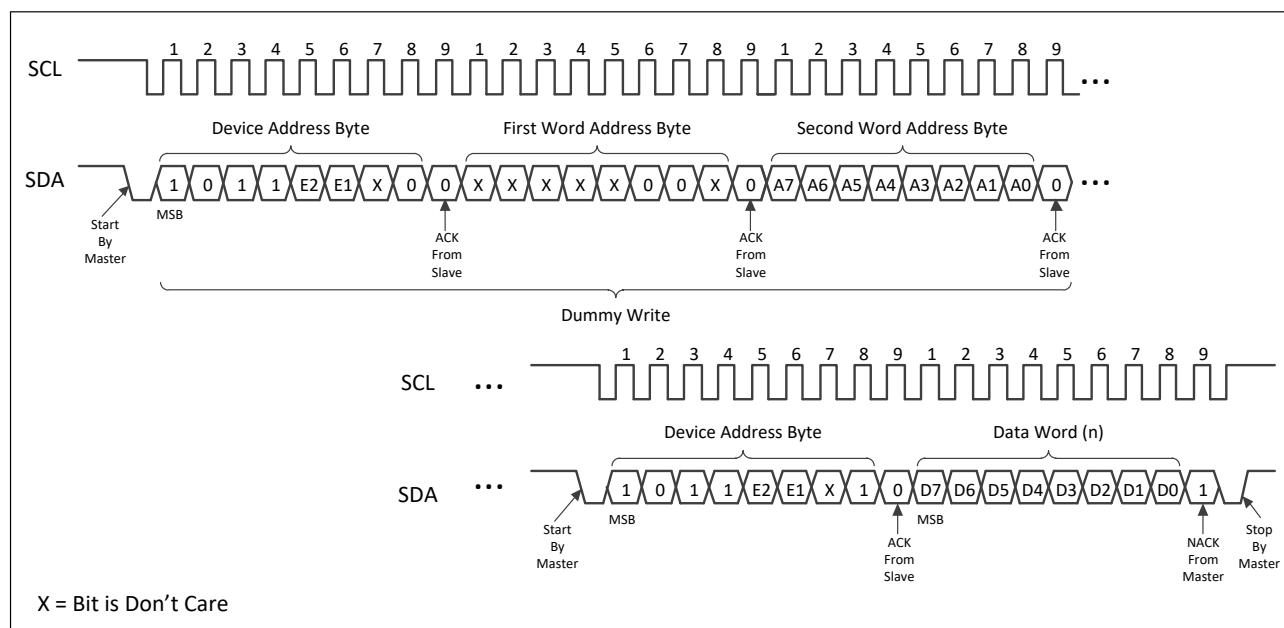

### 5.2.5 Read Lock Status

The locked/unlocked status of the Identification Page can be checked by transmitting a specific truncated command, Write Identification Page instruction and one data byte to the device. The device responds with an ACK to the data byte if the Identification Page is unlocked, or responds with a NACK if the Identification Page has been locked. Right after this, it is recommended to transmit a Start condition to the device followed by a Stop condition (see [Figure 5-14](#)), so that the truncated Write command will not be executed because the Start condition resets the device internal logic, and the device is then set back into Standby mode by the Stop condition.


### 5.2.6 Read SWP Register

Reading the Software Write Protection register is performed with a Read SWP Register instruction (see [Figure 5-15](#)), which is similar to Random Read except that:


- The device type identifier is defined as '1011';
- The word address bits A10:A9 must be '11' and other word address bits are Don't Care;
- The higher six bits of the SWP register content are read as '000000'. Bit 1 and bit 0 are defined in [Section 5.1.7](#).

Reading more than one byte will loop on reading the SWP register value.

**Figure 5–14 Read Lock Status**

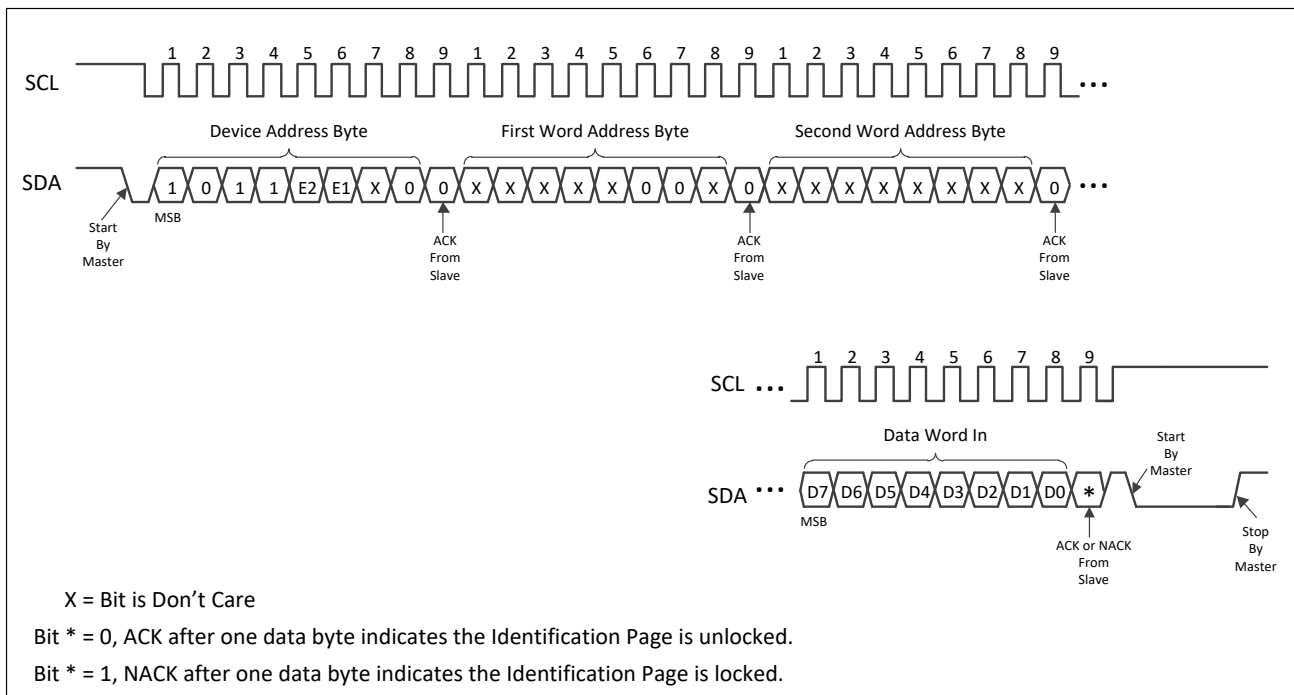

**Figure 5–15 Read SWP Register**

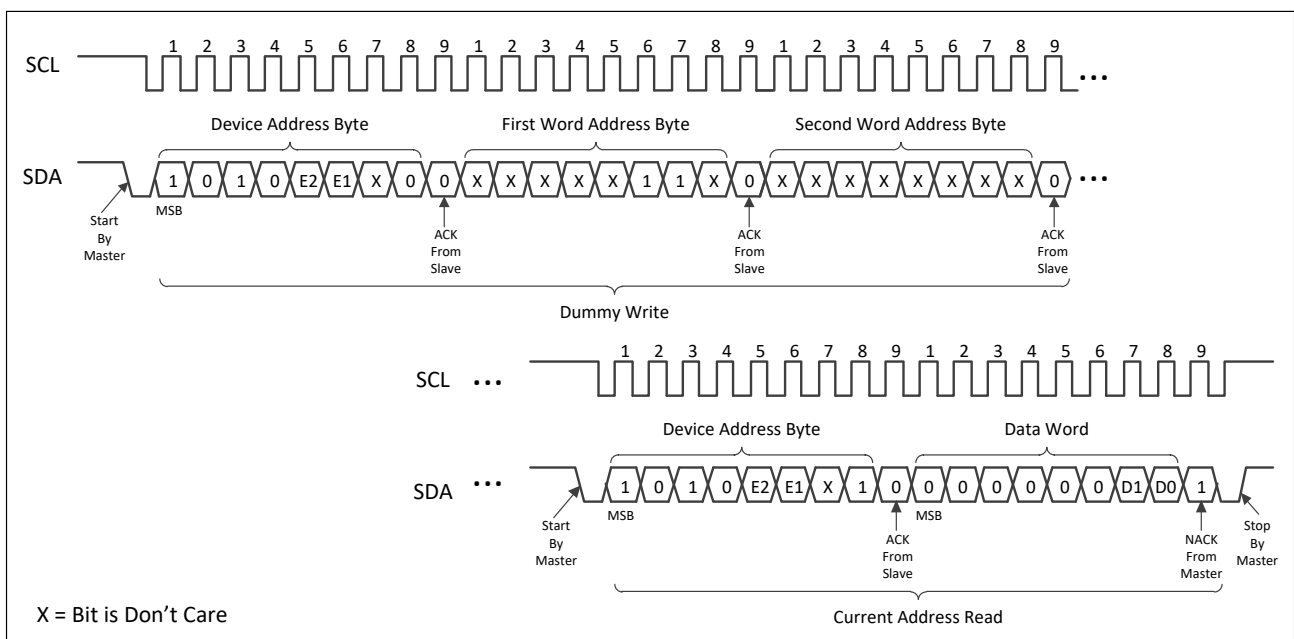


## 5.2.7 Read Unique ID

The TD24CM01-R offers a separate memory block containing a factory programmed 128-bit Unique ID (UID), or Serial Number. Reading the Serial Number is similar to Sequential Read, except that:

- The device type identifier is defined as '1011';
- The word address bits A10:A9 must be be '01', bits A16:A11 and A8:A4 are Don't Care;
- The word address bits A3:A0 define the byte locations inside the Unique ID (see [Table 4–2](#)).

In order to guarantee a unique number, the entire 128-bit value must be read from the starting address of the Serial Number block. Reading from a location other than the first address of the block will not result in a unique Serial Number. To read the first byte of the Serial Number, the word address bits A3:A0 need to be '0000'. Writing or altering the 128-bit Unique ID is not allowed. When the end of the 128-bit UID block is reached (16 bytes of data), the word address will roll over to the beginning of the 128-bit UID block. The Read Unique ID operation is terminated when the Master responds with a NACK to the data byte followed by a Stop condition (see [Figure 5–16](#)).

**Figure 5–16 Read Unique ID**

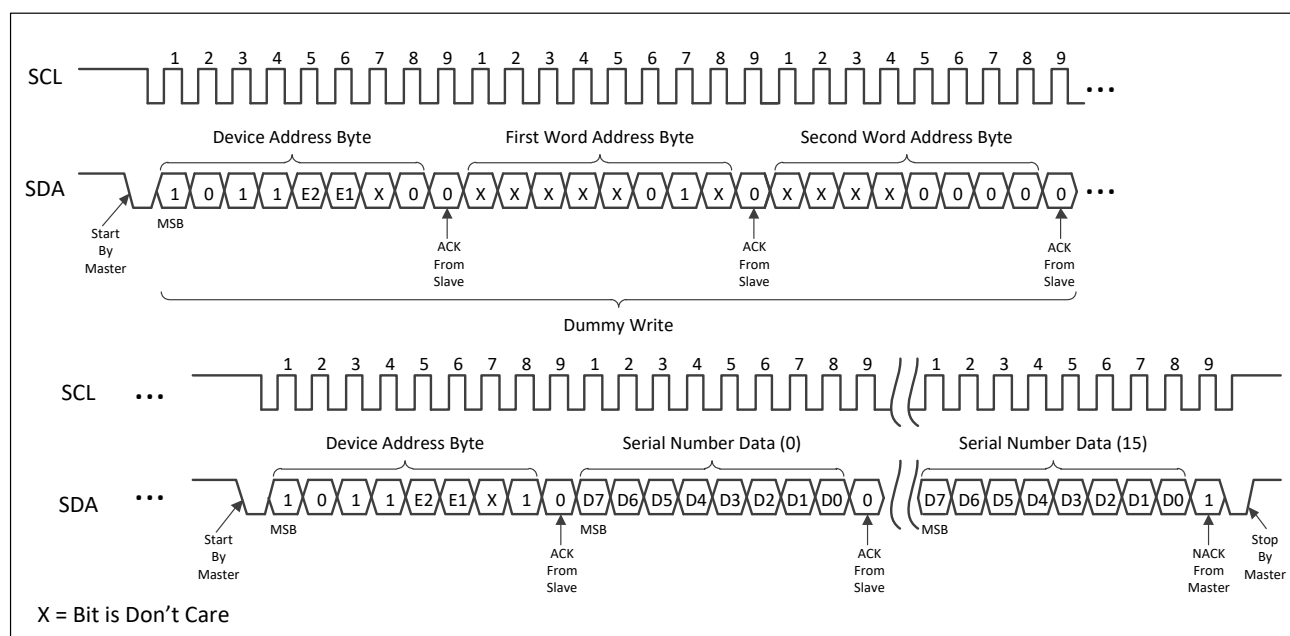

## 6 Electrical Specifications

### 6.1 Absolute Maximum Ratings

Table 6–1 Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
	Ambient temperature with power applied	-55 to +130	°C
$T_{STG}$	Storage temperature	-65 to +150	°C
$V_{CC}$	Supply voltage	-0.5 to +6.0	V
$V_{IN}$	Voltage on input Pins	-0.5 to +6.0	V
$V_{ESD}$	Electrostatic pulse (human body model)	6000	V

**Note:** Stresses beyond those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. Functional operation of the device at these ratings or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### 6.2 DC Characteristics

Operating range:  $T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $V_{CC} = 1.7\text{V}$  to  $5.5\text{V}$  (unless otherwise noted).

Table 6–2 DC Characteristics

Symbol	Parameter	Test Condition	Min	Max	Unit
$V_{CC}$	Supply Voltage		1.7	5.5	V
$I_{CC1}$	Supply Current (Read)	$V_{CC} = 1.7\text{V}$ , Read at 1MHz	-	0.2	mA
		$V_{CC} = 5.5\text{V}$ , Read at 400 kHz	-	0.4	mA
		$V_{CC} = 5.5\text{V}$ , Read at 1MHz	-	0.5	mA
$I_{CC2}$	Supply Current (Write)	$V_{CC} = 1.7\text{V}$ , Write at 400 kHz	-	0.5	mA
		$V_{CC} = 5.5\text{V}$ , Write at 400 kHz	-	1.0	mA
$I_{SB}$	Standby Current	$V_{CC} = 1.7\text{V}$ , $V_{IN} = V_{CC}$ or GND	-	0.5	$\mu\text{A}$
		$V_{CC} = 5.5\text{V}$ , $V_{IN} = V_{CC}$ or GND	-	1.0	$\mu\text{A}$
$I_{LI}$	Input Leakage Current	$V_{IN} = V_{CC}$ or GND	-	1.0	$\mu\text{A}$
$I_{LO}$	Output Leakage Current	$V_{OUT} = V_{CC}$ or GND	-	1.0	$\mu\text{A}$
$V_{IL}$	Input Low-Level Voltage (SDA, SCL)		-0.5	$0.3 \cdot V_{CC}$	V
$V_{IH}$	Input High-Level Voltage (SDA, SCL)		$0.7 \cdot V_{CC}$	$V_{CC} + 0.5$	V
$V_{OL1}$	Low-Level Output Voltage	$V_{CC} > 2\text{V}$ , $I_{OL} = 3\text{mA}$	-	0.4	V
$V_{OL2}$	Low-Level Output Voltage	$V_{CC} \leq 2\text{V}$ , $I_{OL} = 2\text{mA}$	-	0.2	V

### 6.3 AC Characteristics

Operating range:  $T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $V_{CC} = 1.7\text{V}$  to  $5.5\text{V}$ ,  $C_L = 100\text{pF}$  (unless otherwise noted).

Measurement conditions: Input rise and fall time  $\leq 50\text{ns}$

Input pulse voltages:  $0.2 \cdot V_{CC}$  to  $0.8 \cdot V_{CC}$


Input and output timing reference voltages:  $0.3 \cdot V_{CC}$  to  $0.7 \cdot V_{CC}$

**Table 6–3 AC Characteristics**


Symbol	Parameter	Fast Mode $V_{CC} = 1.7V$ to $5.5V$		High Speed Mode $V_{CC} = 1.7V$ to $5.5V$		Unit
		Min	Max	Min	Max	
$f_{SCL}$	Clock Frequency, SCL	-	400	-	1000	kHz
$t_{LOW}$	Clock Pulse Width Low	1300	-	600	-	ns
$t_{HIGH}$	Clock Pulse Width High	600	-	260	-	ns
$t_R^{[1]}$	SDA Rise Time	-	300	-	300	ns
$t_F^{[1]}$	SDA(Out) Fall Time	-	300	-	100	ns
$t_{HD,STA}$	Start Hold Time	600	-	250	-	ns
$t_{SU,STA}$	Start Setup Time	600	-	250	-	ns
$t_{SU,STO}$	Stop Setup Time	600	-	250	-	ns
$t_{BUF}$	Bus Free Time between Stop and Next Start	1300	-	500	-	ns
$t_{HD,DI}$	Data In Hold Time	0.0	-	0.0	-	ns
$t_{SU,DAT}$	Data In Setup Time	100	-	50	-	ns
$t_{HD,DAT}$	Data Out Hold Time	50	-	50	-	ns
$t_{AA}$	SCL Low to Data Out Valid	100	900	50	500	ns
$t_{SU,WP}$	WP Pin Setup Time	1200	-	600	-	ns
$t_{HD,WP}$	WP Pin Hold Time	1200	-	600	-	ns
$t_{WR}$	Write Cycle Time	-	3	-	3	ms
$t_i$	Noise Suppression Time	-	50	-	50	ns

**Note:** <sup>[1]</sup> This parameter is ensured by characterization only.

**Figure 6–1 Bus Timing**

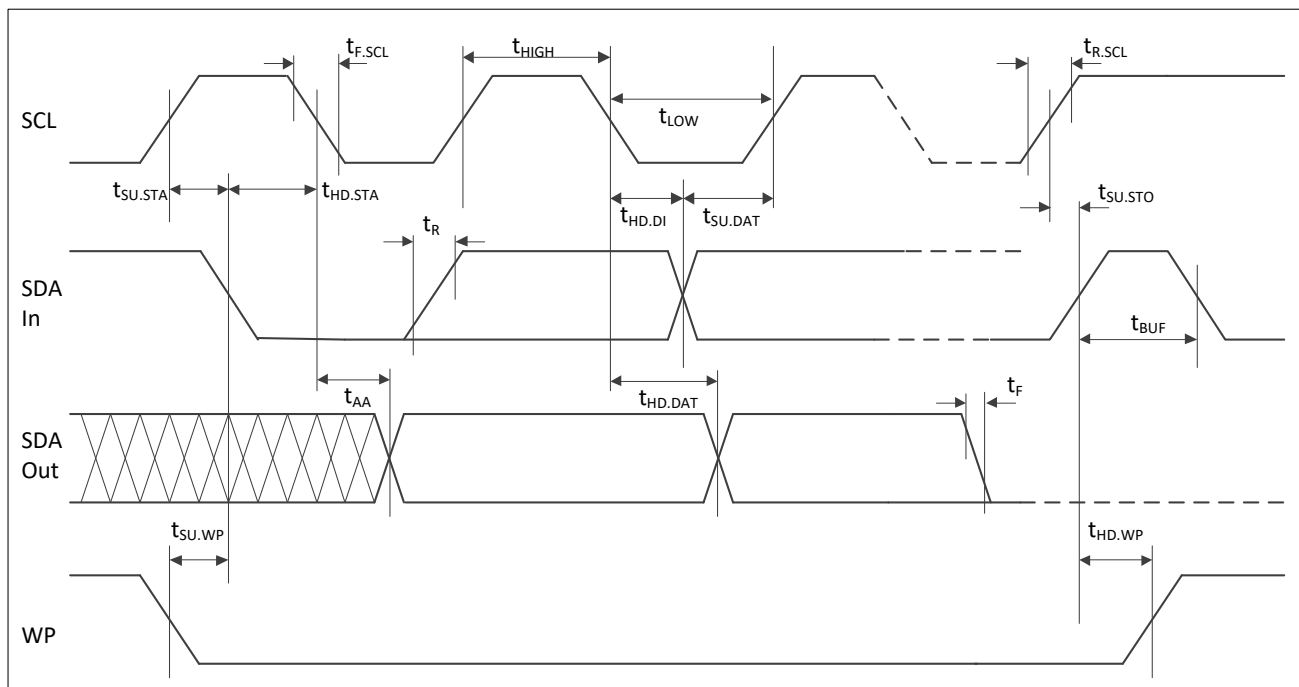

**Figure 6–2 Maximum Pull-up Resistance vs. Bus Parasitic Capacitance**

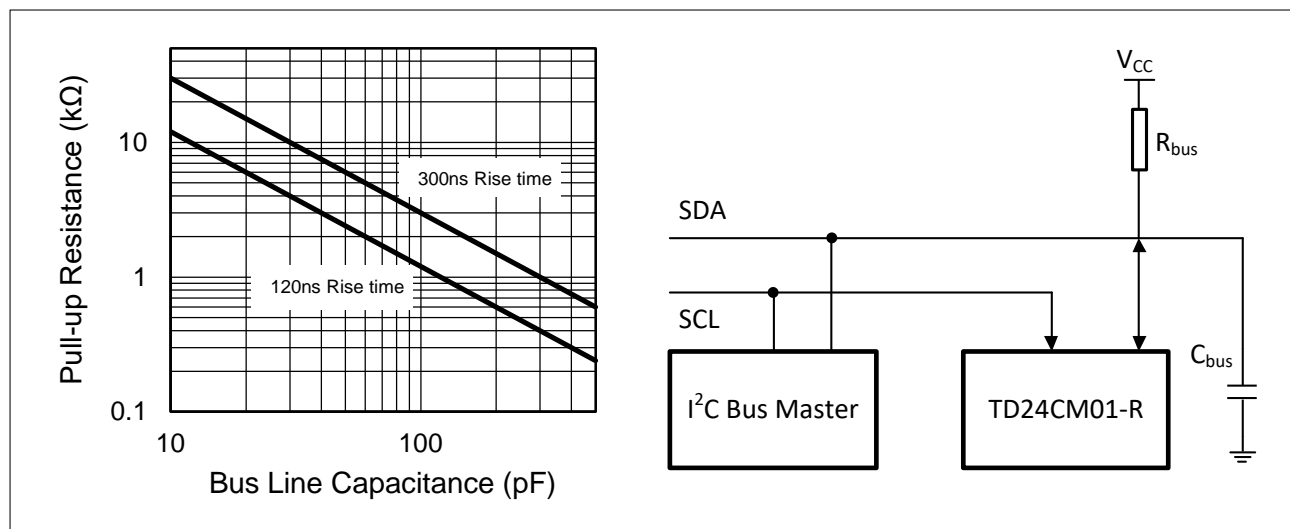

## 6.4 Pin Capacitance

Operating range for pin capacitance:  $T_A = +25^\circ\text{C}$ ,  $f_C = 1\text{MHz}$ ,  $V_{CC} = 1.7\text{V}$  to  $5.5\text{V}$ .

**Table 6–4 Pin Capacitance**

Symbol	Parameter <sup>[1]</sup>	Max	Unit	Test Condition
$C_{I/O}$	Input/output Capacitance (SDA)	8	pF	$V_{I/O} = 0\text{V}$
$C_{IN}$	Input Capacitance (other Pins)	6	pF	$V_{IN} = 0\text{V}$

**Note:** <sup>[1]</sup> These parameters are ensured by characterization only.

## 6.5 Reliability Characteristics

**Table 6–5 Reliability Characteristics**

Symbol	Parameter	Min	Unit	Test Condition
$N_W$	Write Cycle Endurance	$2 \times 10^6$	cycle	$T_A = +25^\circ\text{C}$ , Page Mode
$D_R$	Data Retention	200	year	$T_A = +25^\circ\text{C}$

## 7 Initial Delivery State


The TD24CM01-R serial EEPROM is delivered as follows:

- All bits in the memory array are set to '1' (each byte contains FFh);
- All bits in the Identification Page are set to '1' (each byte contains FFh);
- All bits in the SWP register are set to '0'.



## 8 Ordering Information

Table 8–1 Ordering information scheme

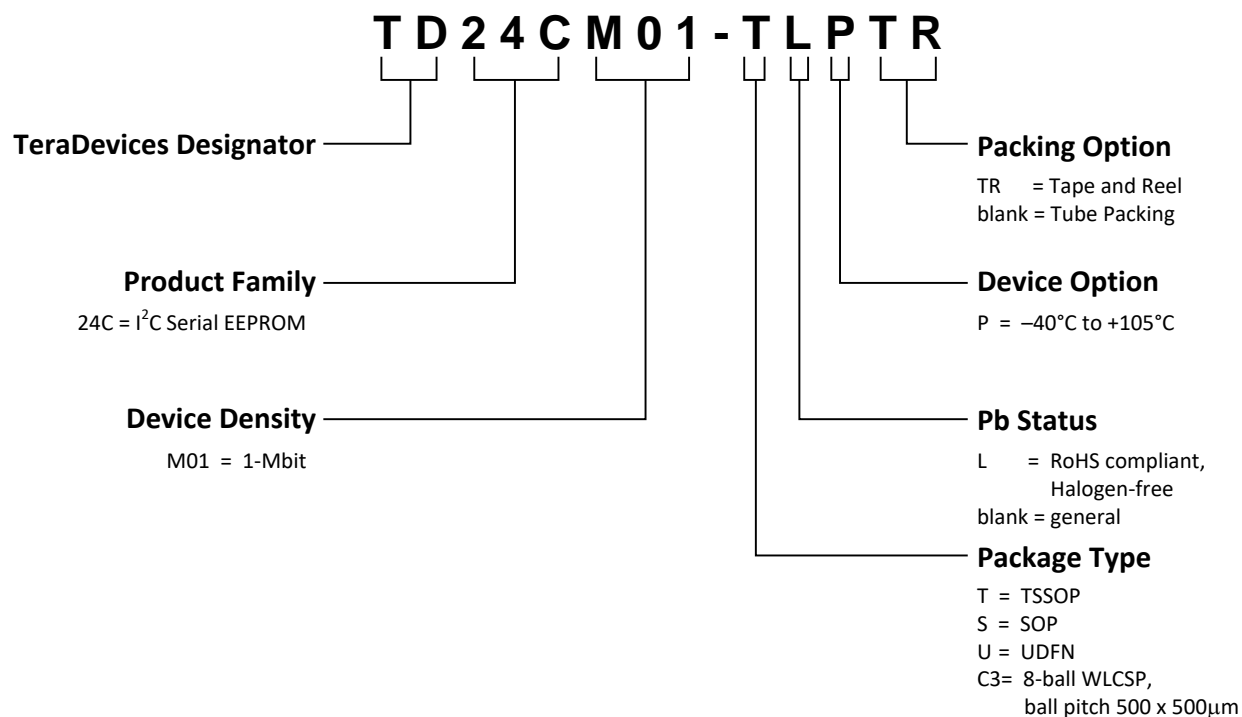


Package types not listed below may be available for order. Please contact TeraDevices for availability details.

Part Number	Package	Delivery Information	Temperature Range
TD24CM01-SLPTR	4.9 x 3.9mm SOP	Tape and Reel, 4000 units per Reel	-40°C to +105°C
TD24CM01-TLPTR	3.0 x 4.4mm TSSOP	Tape and Reel, 5000 units per Reel	-40°C to +105°C
TD24CM01-ULPTR	2.0 x 3.0mm UDFN	Tape and Reel, 3000 units per Reel	-40°C to +105°C
TD24CM01-C3LPTR	8-ball 500 x 500µm WLCSP	Tape and Reel, 4000 units per Reel	-40°C to +105°C

## 9 Top Markings

### 9.1 SOP Package Marking

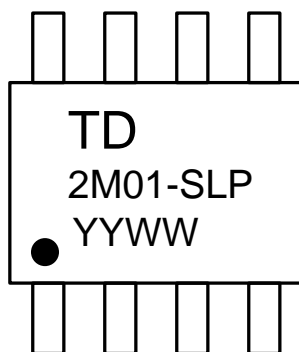


**TD:** TeraDevices Logo

2M01-SLP: TD24CM01-SLP

YYWW: Date Code, YY = year, WW = week

*Example:* 2040 = year 2020 and week 40

### 9.2 TSSOP Package Marking

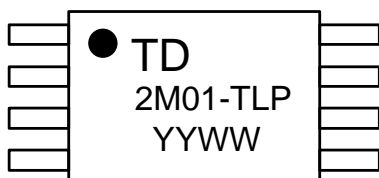


**TD:** TeraDevices Logo

2M01-TLP: TD24CM01-TLP

YYWW: Date Code, YY = year, WW = week

*Example:* 2040 = year 2020 and week 40

### 9.3 UDFN Package Marking




**TD:** TeraDevices Logo

2M01ULP: TD24CM01-ULP

YYWW: Date Code, YY = year, WW = week

*Example:* 2040 = year 2020 and week 40

## 9.4 WLCSP Package Marking



AD: TD24CM01-C3LP


YWW: Date Code, Y = year, WW = week

*Example:* 050 = year 2020, week 50

## 10 Package Information


### 10.1 SOP Package Information

Figure 10–1 8-Lead 4.9 x 3.9mm SOP Package Outline

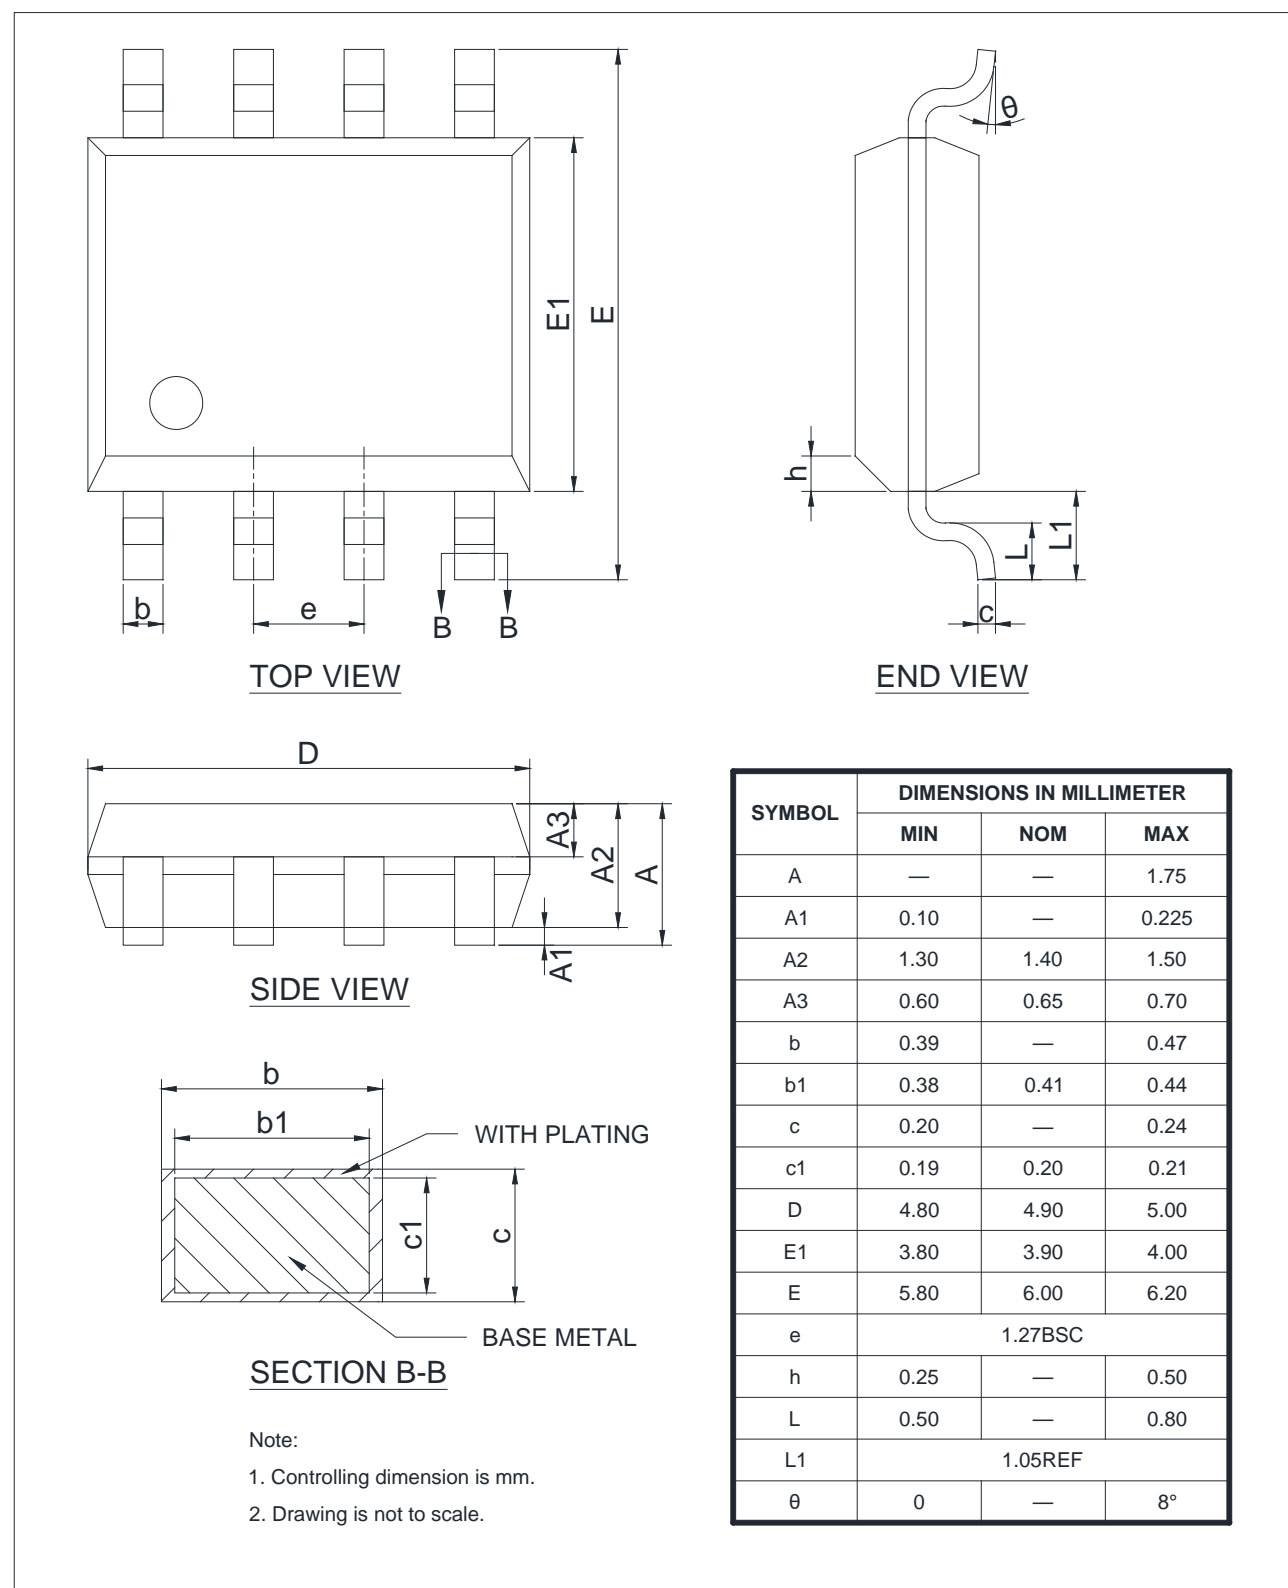


## 10.2 TSSOP Package Information


Figure 10–2 8-Lead 3.0 x 4.4mm TSSOP Package Outline

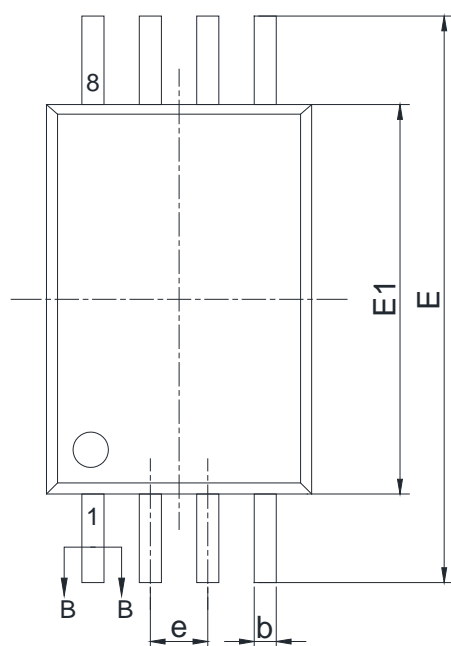


TOP VIEW

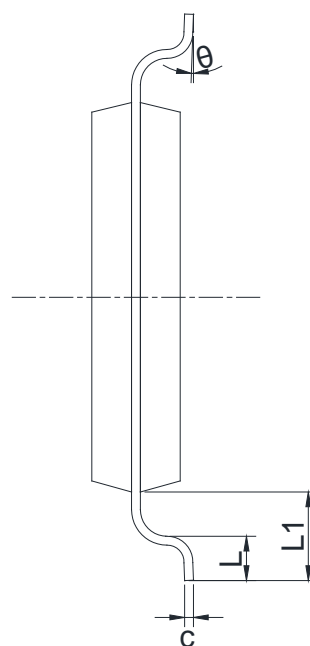

END VIEW

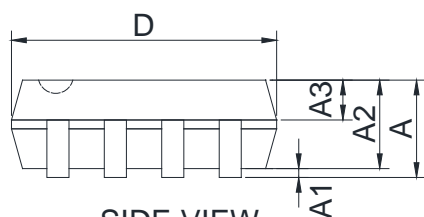

SIDE VIEW

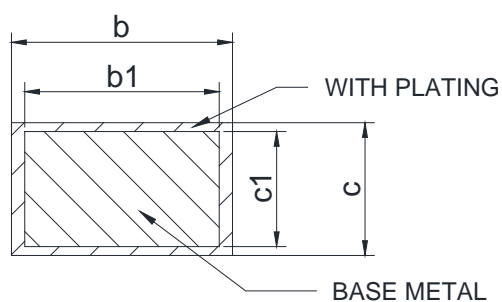

SECTION B-B


Note:

1. Controlling dimension is mm.
2. Drawing is not to scale.

SYMBOL	DIMENSIONS IN MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.20
A1	0.05	—	0.15
A2	0.90	1.00	1.05
A3	0.39	0.44	0.49
b	0.20	—	0.28
b1	0.19	0.22	0.25
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	2.90	3.00	3.10
E1	4.30	4.40	4.50
E	6.20	6.40	6.60
e	0.65BSC		
L	0.45	—	0.75
L1	1.00REF		
θ	0	—	8°

## 10.3 UDFN Package Information

Figure 10–3 8-Pad 2.0 x 3.0mm UDFN Package Outline

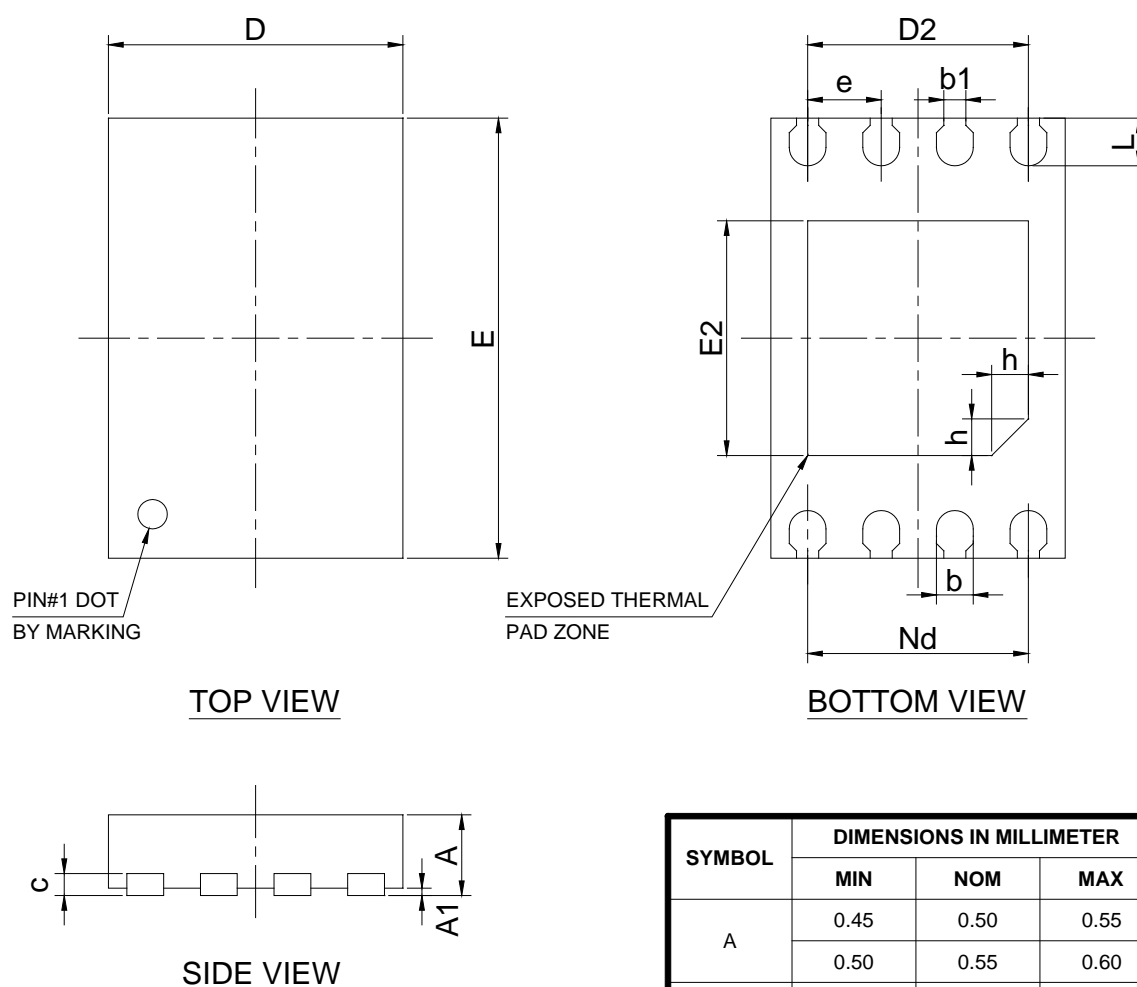



Note:

1. Controlling dimension is mm.
2. Drawing is not to scale.
3. Default thickness marked by symbol A is 0.55mm (NOM), 0.50mm (NOM) is an alternative if needed.

SYMBOL	DIMENSIONS IN MILLIMETER		
	MIN	NOM	MAX
A	0.45	0.50	0.55
	0.50	0.55	0.60
A1	0	0.02	0.05
b	0.18	0.25	0.30
b1	0.16REF		
c	0.10	0.15	0.20
D	1.90	2.00	2.10
D2	1.40	1.50	1.60
e	0.50BSC		
Nd	1.50BSC		
E	2.90	3.00	3.10
E2	1.50	1.60	1.70
L	0.30	0.40	0.50
h	0.20	0.25	0.30

## 10.4 WLCSP Package Information

Figure 10–4 8-Ball 500 x 500µm WLCSP Package Outline

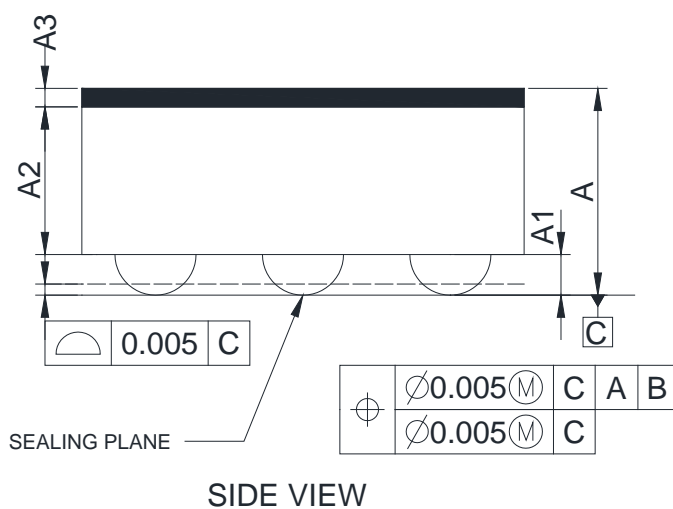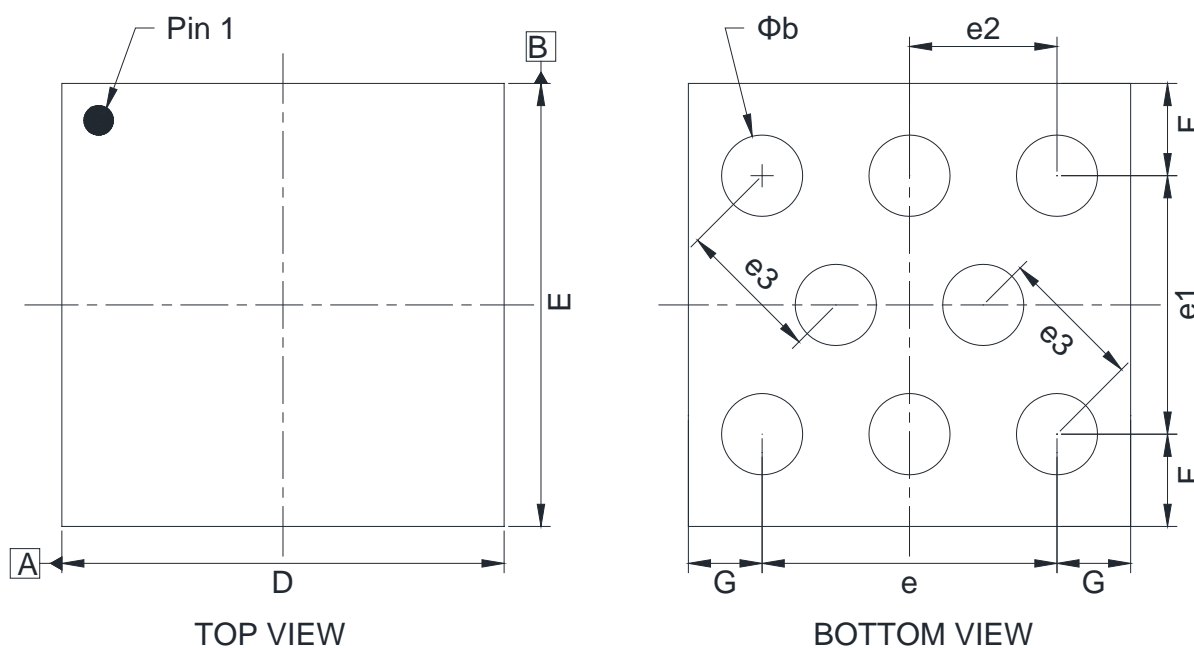

Note:

1. Controlling dimension is mm.
2. Drawing is not to scale.
3. Seating plane is defined by the spherical crowns of the bump.
4. Product is offered with 25µm back side coating (BSC).

SYMBOL	DIMENSIONS IN MILLIMETER		
	MIN	NOM	MAX
A		0.365	
A1		0.090	
A2		0.250	
A3		0.025	
b		0.260	
D		1.520	
E		1.546	
e		1.000	
e1		0.866	
e2		0.500	
e3		0.500	
F		0.340	
G		0.260	

## 11 Revision History

Revision	Date	Comments
Rev.1.0	Dec. 2020	Initial version release
Rev.1.1	Oct. 2021	Updated: <ul style="list-style-type: none"> <li>— <a href="#">Features</a></li> <li>— <math>t_{INIT}</math> value in <a href="#">Table 3–1</a></li> <li>— <math>I_{CC1}</math>, <math>I_{CC2}</math>, <math>I_{SB}</math> value in <a href="#">Table 6–2</a></li> </ul>